

A Collocation Method for Optimal Control of Linear Systems with Inequality Constraints

M. RAZZAGHI^{a,c,*}, J. NAZARZADEH^b and K.Y. NIKRAVESH^b

^a*Department of Mathematics and Statistics, Mississippi State University, Mississippi State, MS 39762, USA;* ^b*Department of Electrical Engineering,*

^c*Department of Mathematics, Amirkabir University, Tehran, Iran*

(Received 29 May 1997)

A numerical method for solving linear quadratic optimal control problems with control inequality constraints is presented in this paper. The method is based upon hybrid function approximations. The properties of hybrid functions which are the combinations of block-pulse functions and Legendre polynomials are first presented. The operational matrix of integration is then utilized to reduce the optimal control problem to a set of simultaneous nonlinear equations. The inequality constraints are first converted to a system of algebraic equalities, these equalities are then collocated at Legendre–Gauss–Lobatto nodes. An illustrative example is included to demonstrate the validity and applicability of the technique.

Keywords: Optimal control; Inequality constraints; Legendre polynomials; Legendre–Gauss–Lobatto nodes

1. INTRODUCTION

Orthogonal functions, often used to represent an arbitrary time function, have recently been used to solve various problems of dynamic systems. Typical examples are the Walsh function [1], block-pulse functions [2], Laguerre polynomials [3], Legendre polynomials [4], Chebyshev series [5] and Fourier series [6].

* Corresponding author. Fax: 601-325-0005. E-mail: razzaghi@math.msstate.edu.

The design of optimal feedback was obtained by Kleinman [7]. Similar problems for linear systems have been studied either by means of the Walsh functions [1] or by means of the block-pulse functions [2]. Due to the nature of these functions, the solutions obtained were piecewise constant. Most of these methods successfully solve the unconstrained problem, but the presence of inequality constraints often resulted in both analytical and computational difficulties. Theoretical aspects of trajectories inequality constraint have been studied in [8,9]. Early contribution to the numerical computation were due to [10,11]. Mehra and Davis [11] described that difficulties arising from handling trajectories inequality constraints are due to the exclusive use of control variables as independent variables and presented the so-called generalized gradient technique.

In the present paper we introduce a new direct computational method for solving linear quadratic optimal control with control inequality constraints. The method consists of reducing the optimal control problem to a set of nonlinear algebraic equations by first expanding the candidate function as a hybrid function with unknown coefficients. The hybrid functions which are the combinations of block-pulse functions and Legendre polynomials are introduced. The operational matrix of integration is then utilized to evaluate the hybrid function coefficients. The control inequality constraints are first transferred into a system of algebraic equalities. The given system are collocated at Legendre–Gauss–Lobatto (LGL) nodes [12]. When the optimal control inequalities constraints are not satisfied in the whole desired interval, in each subintervals for which the constraints is violated, we change the given LGL nodes with the extremum of the solution in that subinterval. An illustrative example is given to demonstrate the application of the proposed method.

2. PROPERTIES OF HYBRID FUNCTIONS

2.1. Hybrid Functions

Hybrid functions $b(n, m, t)$, $n = 1, \dots, N$, $m = 0, \dots, M$ defined on $[0, t_f]$, have three arguments, m and n are the order for Legendre polynomials and block-pulse functions respectively and t is the normalized time and

is defined as

$$b(n, m, t) = \begin{cases} P_m\left(\frac{2N}{t_f}t - 2n + 1\right), & t \in \left[\frac{n-1}{N}t_f, \frac{n}{N}t_f\right), \quad n = 1, 2, 3, \dots, N, \\ 0 & \text{elsewhere.} \end{cases} \quad m = 0, 1, 2, \dots, M, \quad (1)$$

Here, $P_m(t)$ are the well-known Legendre polynomials of order m which are orthogonal in the interval $[-1, 1]$ and satisfy the following recursive formula:

$$P_0(t) = 1, \quad (2)$$

$$P_1(t) = t \quad (3)$$

and

$$P_{m+1}(t) = \frac{2m+1}{m+1}tP_m(t) - \frac{m}{m+1}P_{m-1}(t). \quad (4)$$

Since $b(n, m, t)$ is the combination of Legendre polynomials and block-pulse functions which are both complete and orthogonal, thus the set of hybrid functions are complete orthogonal set. Figure 1 shows the hybrid functions for $M=2$ and $N=4$.

The hybrid representation of a function $f(t)$ defined over $[0, t_f]$ is given by a finite series as

$$f(t) \cong \sum_{m=0}^M \sum_{n=1}^N c(n, m)b(n, m, t) = C^T B(t), \quad (5)$$


where

$$c(n, m) = \frac{(2m+1)}{t_f} N \int_{(n-1)/t_f}^{n/t_f} f(t)b(n, m, t) dt, \quad n = 1, \dots, N, \quad m = 0, \dots, M \quad (6)$$

and

$$C = [c(1, 0), \dots, c(N, 0), c(1, 1), \dots, c(N, 1), \dots, c(1, M), \dots, c(N, M)]^T, \quad (7)$$

$$B(t) = [b(1, 0, t), \dots, b(N, 0, t), b(1, 1, t), \dots, b(N, 1, t), \dots, b(1, M, t), \dots, b(N, M, t)]^T. \quad (8)$$

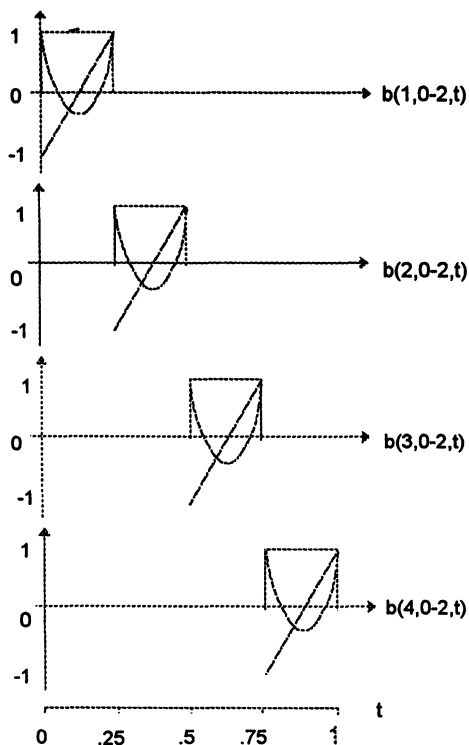FIGURE 1 Hybrid functions for $N=4$ and $M=2$.

The orthogonality property is given by

$$\int_0^{t_f} B(t)B^T(t) dt = \frac{t_f}{N} \text{diag} \left[I, \frac{I}{3}, \dots, \frac{I}{2M+1} \right]. \quad (9)$$

2.2. Operational Matrix of Integration

The integration of the vector $B(t)$ defined in Eq. (8) can be approximated by

$$\int_0^t B(t') dt' \cong PB(t), \quad (10)$$

where P is the $NM \times NM$ operational matrix for integration and is given by

$$P = \frac{t_f}{N} \begin{bmatrix} P_0 & \frac{I}{2} & 0 & 0 & \dots & 0 & 0 & 0 \\ -\frac{I}{6} & 0 & \frac{I}{6} & 0 & \dots & 0 & 0 & 0 \\ 0 & -\frac{I}{10} & 0 & \frac{I}{10} & \dots & 0 & 0 & 0 \\ \dots & \dots & \dots & \dots & \dots & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & \dots & -\frac{I}{2(2M+1)} & 0 & \frac{I}{2(2M+1)} \\ 0 & 0 & 0 & 0 & \dots & 0 & -\frac{I}{2(2M+1)} & 0 \end{bmatrix}. \quad (11)$$

In Eq. (11), I is an $N \times N$ identity matrix and

$$P_0 = \begin{bmatrix} \frac{1}{2} & 1 & \dots & 1 & 1 \\ 0 & \frac{1}{2} & \dots & 1 & 1 \\ \dots & \dots & \dots & 1 & 1 \\ 0 & 0 & \dots & \frac{1}{2} & 1 \\ 0 & 0 & \dots & 0 & \frac{1}{2} \end{bmatrix}, \quad (12)$$

3. OPTIMAL CONTROL PROBLEM

Consider the following class of linear systems with control inequality constraints:

$$\dot{x}(t) = Ax(t) + Eu(t), \quad x(0) = x_0, \quad (13)$$

$$|u_j(t)| \leq u_j^*, \quad j = 1, \dots, s \quad (14)$$

with the cost functional

$$J = \frac{1}{2} \int_0^{t_f} (x^T(t)Qx(t) + u^T(t)Ru(t)) dt. \quad (15)$$

Here, $x(t)$ and $u(t)$ are $r \times 1$ and $s \times 1$ state and control vectors respectively, A , E , Q and R are matrices of appropriate dimensions, t_f is the final time which is given, Q and R are symmetric semidefinite and positive-definite matrices respectively. The problem is to find the optimal control $u(t)$ which minimizes Eq. (15), subject to the constraints of Eq. (13) and the control inequality constraints of Eq. (14).

4. HYBRID FUNCTION APPROXIMATIONS

4.1. The Approximation of the System Dynamics

By expanding each of the s control vectors and the derivative of each of the r state vectors by hybrid functions, we get

$$\dot{x}_i(t) = \sum_{m=0}^M \sum_{n=1}^N c_i(n, m) b(n, m, t) = C_i^T B(t), \quad i = 1, 2, \dots, r, \quad (16)$$

$$u_j(t) = \sum_{m=0}^M \sum_{n=1}^N y_j(n, m) b(n, m, t) = Y_j^T B(t), \quad j = 1, 2, \dots, s, \quad (17)$$

where

$$C_i = [c_i(1, 0), \dots, c_i(N, 0), \dots, c_i(1, M), \dots, c_i(N, M)]^T, \quad i = 1, \dots, r, \quad (18)$$

$$Y_i = [y_i(1, 0), \dots, y_i(N, 0), \dots, y_i(1, M), \dots, y_i(N, M)]^T, \quad i = 1, \dots, s. \quad (19)$$

Using Eqs. (16)–(19), the state rate variable $\dot{x}(t)$ and the control vector $u(t)$ can be represented as

$$\dot{x}(t) = [C_1^T, C_2^T, \dots, C_r^T] \hat{B}(t) = \hat{C}^T \hat{B}(t), \quad (20)$$

$$u(t) = [Y_1^T, Y_2^T, \dots, Y_s^T] \hat{B}(t) = \hat{Y}^T \hat{B}(t), \quad (21)$$

where

$$\hat{B}(t) = [B^T(t), B^T(t), \dots, B^T(t)]^T. \quad (22)$$

Using Eq. (20), $x(t)$ can be represented as

$$x(t) = \int_0^t \hat{C}^T \hat{B}(t') dt' + x(0) = \hat{C}^T P \hat{B}(t) + \hat{C}_0^T \hat{B}(t) = (\hat{C}^T P + \hat{C}_0^T) \hat{B}(t), \quad (23)$$

where

$$\hat{C}_0 = [x_1(0), 0, \dots, 0, 0, x_2(0), 0, \dots, 0, 0, \dots, x_r(0), 0, \dots, 0]^T. \quad (24)$$

Substituting Eqs. (20), (21) and (23) in Eq. (13) we get the following algebraic equations:

$$\hat{C} = \hat{Y}E^T + (P^T \hat{C} + \hat{C}_0)A^T. \quad (25)$$

Now, the inequality constraints (14) are incorporated into the above scheme. Equation (14) can be replaced by the finite number of algebraic equalities as

$$u_j^2(t) + z_j^2(t) = u_j^{*2}, \quad j = 1, 2, \dots, s, \quad (26)$$

where $z_j(t)$ is an auxiliary function.

By expanding each $z_j(t)$, $j = 1, \dots, s$ in hybrid functions we get

$$z_j(t) = \sum_{m=0}^M \sum_{n=1}^N Z_j(n, m) b(n, m, t) = \hat{Z}_j^T B(t), \quad j = 1, 2, \dots, s. \quad (27)$$

Using Eqs. (17), (26) and (27) we obtain

$$Y_j^T B(t) B^T(t) Y_j + \hat{Z}_j^T B(t) B^T \hat{Z}_j(t) = u_j^{*2}, \quad j = 1, 2, \dots, s. \quad (28)$$

4.2. The Performance Index Approximation

The performance index J can also be expressed as a function of the unknown \hat{C} and \hat{Y} . Using Eqs. (15), (21) and (23) we obtain

$$J = \frac{1}{2} [\hat{C}_0^T + \hat{C}^T P] \left(\int_0^t \hat{B}(t) Q \hat{B}^T(t) dt \right) [\hat{C}_0 + P^T \hat{C}] + \frac{1}{2} \hat{Y}^T \left(\int_0^t \hat{B}(t) R \hat{B}^T(t) dt \right) \hat{Y}. \quad (29)$$

By applying Kronecker product [13] we have

$$\hat{B}(t) Q \hat{B}^T(t) = (\hat{B}(t) \otimes \hat{B}(t)) Q_v, \quad (30)$$

$$\hat{B}(t) R \hat{B}^T(t) = (\hat{B}(t) \otimes \hat{B}(t)) R_v, \quad (31)$$

where Q_v and R_v are the vector form for the matrices Q and R and \otimes denotes Kronecker product. Equation (29) can be written as

$$J = \frac{1}{2}[\hat{C}_0^T + \hat{C}^T P]D_v Q_v[\hat{C}_0 + P^T \hat{C}] + \frac{1}{2}[\hat{Y}^T D_v R_v \hat{Y}], \quad (32)$$

where D_v is the vector form for the matrix D in Eq. (9).

4.3. Replacing the Inequality Control Constraints Using Collocation Method

To satisfy the inequality constraints in the desired interval we first collocate Eq. (28) at $M \times N$ points; thus we get

$$\begin{aligned} Y_j^T B(t_k) B^T(t_k) Y_j + \hat{Z}_j^T B(t_k) B^T(t_k) \hat{Z}_j &= u_j^{*2}, \\ k &= 1, 2, \dots, M \times N, \quad j = 1, 2, \dots, s. \end{aligned} \quad (33)$$

For a suitable collocation points $t_k, k = 1, \dots, M \times N$ we use the LGL nodes in $[0, t_f/N]$ which are defined in [12] as follows.

Let $P_M(t), -1 \leq t \leq 1$ denote the Legendre polynomials of order M ; then the LGL nodes are defined by

$$t_0 = -1, \quad t_M = 1, \quad t_k \text{ are the zeros of } \dot{P}_M(t), \quad 1 \leq k \leq M-1, \quad (34)$$

where $\dot{P}_M(t)$ denotes the 1st derivative of $P_M(t)$. No explicit formula of the nodes in (34) is known. However, they can be computed numerically.

In order to use LGL nodes for Eq. (1) we transfer $[-1, 1]$ into

$$\left[\frac{n-1}{N} t_f, \frac{n}{N} t_f \right].$$

It is noted that Eq. (1) has an extremum point at LGL nodes. Once the optimal control for Eqs. (13)–(16) is obtained the intervals for which the inequality constraints (14) are violated would be considered again. The new collocation points in these intervals are obtained from the extremum of the pervious solution. This process is continued until the inequality constraints (14) are satisfied in the whole interval.

The minimization problem of Eq. (15) subject to Eqs. (13) and (14) is reduced to a parameter optimization problem which can be stated as follows. Find \hat{C} , \hat{Y} and \hat{Z} which minimizes the following equations:

$$L(\hat{C}, \hat{Y}, \hat{Z}, \lambda) = J(\hat{C}, \hat{Y}) + \lambda^T [\hat{Y}E^T + (P^T \hat{C} + \hat{C}_0)A^T - \hat{C}], \quad (35)$$

where λ is the Lagrange multiplier. The determining equations for the unknowns \hat{C} , \hat{Y} , \hat{Z} and λ are

$$\frac{\partial}{\partial \hat{C}} L(\hat{C}, \hat{Y}, \hat{Z}, \lambda) = 0, \quad (36)$$

$$\frac{\partial}{\partial \hat{Y}} L(\hat{C}, \hat{Y}, \hat{Z}, \lambda) = 0, \quad (37)$$

$$\frac{\partial}{\partial \hat{Z}} L(\hat{C}, \hat{Y}, \hat{Z}, \lambda) = 0, \quad (38)$$

$$\frac{\partial}{\partial \lambda} L(\hat{C}, \hat{Y}, \hat{Z}, \lambda) = 0. \quad (39)$$

Equations (36)–(39) are nonlinear equations which can be solved by Newton's iterative method.

5. ILLUSTRATIVE EXAMPLE

Consider the linear system with inequality control constraint [14],

$$x(t) = \begin{bmatrix} 0 & 1 \\ 1 & -1 \end{bmatrix} x(t) + \begin{bmatrix} 0 \\ 1 \end{bmatrix} u(t), \quad x(0) = [0 \quad 10]^T, \quad (40)$$

$$|u(t)| \leq 1, \quad (41)$$

with the cost functional

$$J = \frac{1}{2} \int_0^1 (x_1^2(t) + u^2(t)) dt. \quad (42)$$

The problem is to find the optimal control $u(t)$ which minimizes Eq. (42) subject to Eqs. (40) and (41). The exact solutions for this

example are

$$u(t) = \begin{cases} -1 & 0 \leq t \leq 0.29115 \\ 6.26 \sinh\left(\frac{\sqrt{3}}{2}t\right) \sin\left(\frac{t}{2} + 1.14\right)^{-1} - 0.31 \cosh\left(\frac{\sqrt{3}}{2}t\right) \sin\left(\frac{t}{2} + 0.19\right) & \\ 0.29115 \leq t \leq 1 & \end{cases} \quad (43)$$

and

$$J = 7.99455. \quad (44)$$

We determine the hybrid functions approximation for $N=3$ and $M=2$. Let

$$\dot{x}_i(t) = \sum_{m=0}^2 \sum_{n=1}^3 c_i(n, m) b(n, m, t) = C_i^T B(t), \quad i = 1, 2, \quad (45)$$

$$u(t) = \sum_{m=0}^2 \sum_{n=1}^3 y(n, m) b(n, m, t) = Y^T B(t). \quad (46)$$

Using Eq. (25) we get

$$C_1 = P^T C_2 + C_{02}, \quad C_2 = -P^T C_2 - C_{02} + Y. \quad (47)$$

By applying Eq. (32) we obtain

$$\begin{aligned} J = & \frac{1}{81} \{c_1(1, 0)[7c_1(1, 0) + 0.5c_1(1, 1) - 0.1c_1(1, 2) + 9c_1(2, 0) \\ & - c_1(2, 1) + 3c_1(3, 0) - c_1(3, 1)] + c_1(2, 0)[4c_1(2, 0) \\ & - 0.5c_1(2, 1) - 0.1c_1(2, 2) + 3c_1(3, 0) - c_1(3, 1)] \\ & + 0.01c_1(1, 2)^2 + 0.01c_1(2, 2)^2 + 0.01c_1(3, 2)^2 \\ & + 0.1c_1(1, 1)^2 + 0.1c_1(2, 1)^2 + 0.1c_1(3, 1)^2 + c_1(3, 0) \\ & \times [c_1(3, 0) - 0.5c_1(3, 1) - 0.1c_1(3, 2)]\} \\ & + \sum_{m=0}^2 \sum_{n=1}^3 \frac{y(n, m)^2}{2m+1}. \end{aligned} \quad (48)$$

By using LGL nodes in $[0, 1]$ and Eq. (33) the inequality constraints in Eq. (41) is replaced by

$$\begin{aligned} -1 + [y(n, 1) + y(n, 2) - y(n, 0)]^2 + [z(n, 1) + z(n, 2) - z(n, 0)]^2 &= 0, \\ n &= 1, 2, 3, \\ -1 + [y(n, 0) - 0.5y(n, 2)]^2 + [z(n, 0) - 0.5z(n, 2)]^2 &= 0, \quad n = 1, 2, 3, \quad (49) \\ -1 + [y(n, 0) + y(n, 1) + y(n, 2)]^2 + [z(n, 0) + z(n, 1) + z(n, 2)]^2 &= 0, \\ n &= 1, 2, 3. \end{aligned}$$

Further, Eqs. (36)–(39) give five nonlinear algebraic equations from which $x_1(t)$, $x_2(t)$ and $u(t)$ can be calculated. The computational results for $x_1(t)$, $x_2(t)$ and $u(t)$ together with the exact solution for $u(t)$ are given in Fig. 2. The curves of exact and computational solutions for $x_1(t)$ and $x_2(t)$ are the same. In this case the minimum value for J is

$$J = 8.05035. \quad (50)$$

It is noted that the inequality constraint is not satisfied in the interval $[0, 0.2]$. In this interval we replace the LGL nodes $t_2 = 0.16667$ with $t_2^1 = 0.0825$, where t_2^1 is the minimum $u(t)$ in $[0, 0.2]$. Figure 3 shows state vector and control input together with the exact solution for $u(t)$ for new collocation points. The curves of the exact and computational solutions for $x_1(t)$ and $x_2(t)$ are the same.

It is seen that Eq. (41) is satisfied in $[0, 1]$. In this case the minimum value for the J is

$$J = 8.03060. \quad (51)$$

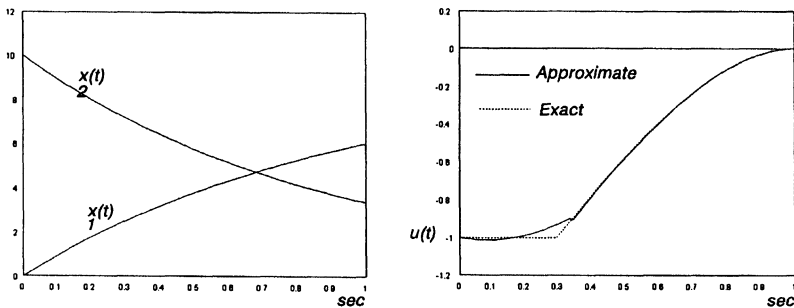


FIGURE 2 Approximate and exact solutions for $x_1(t)$, $x_2(t)$ and $u(t)$ for LGL nodes.

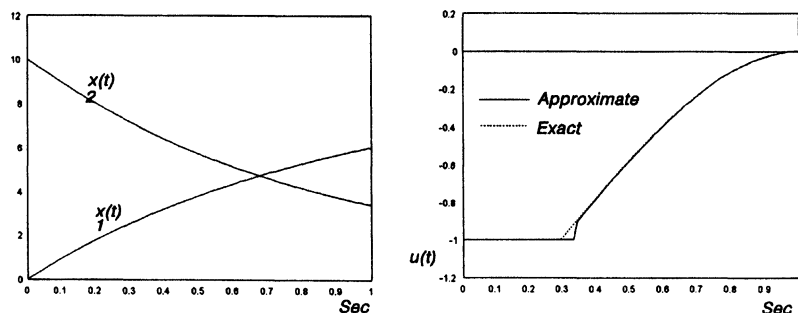


FIGURE 3 Approximate and exact solutions for $x_1(t)$, $x_2(t)$ and $u(t)$ for new collocation points.

6. CONCLUSION

In the present work the hybrid functions which are the combinations of block-pulse functions and Legendre polynomials are used to solve the optimal control of linear systems subject to a quadratic cost criteria with control inequality constraints. The problem has been reduced to a problem of solving a system of algebraic equations. The control inequality constraints are adjoined into the optimization problem by using LGL nodes. An example is given to demonstrate the application of the proposed method.

References

- [1] C.F. Chen and C.H. Hasio, A Walsh series direct method for solving variational problems, *J. Franklin Inst.*, **300** (1975) 265–280.
- [2] N.S. Hsu and B. Cheng, Analysis and optimal control of time-varying linear systems via block-pulse functions, *Int. J. Control*, **33** (1989) 1107–1122.
- [3] C. Hwang and Y.P. Shih, Laguerre series direct method for variational problems, *J. of Optimization Theory and Applications*, **39** (1983) 143–149.
- [4] R.Y. Chang and M.L. Wang, Shifted Legendre direct method for variational problems, *J. Optimization Theory and Applications*, **39** (1983) 143–149.
- [5] I.R. Horng and J.H. Chou, Shifted Chebyshev direct method for solving variational problems, *Int. J. Systems Sci.*, **16** (1985) 855–895.
- [6] M. Razzaghi and M. Razzaghi, Fourier series direct method for variational problems, *Int. J. Control*, **48** (1988) 887–895.
- [7] D.L. Kleinman, T. Fortmann and M. Athans, On the design of linear systems with piecewise-constant feedback gains, *IEEE. Trans. on Automatic Control*, **AC-13** (1968) 354–361.
- [8] L.D. Berkovitz, Variational methods in problems of control and programming, *J. Math. Anal. Appl.*, **3** (1961) 145–155.

- [9] S.L. Chang, Optimal control in bounded state space, *Automatica*, **1** (1961) 55–63.
- [10] S.F. Dreyfus, variational problems with state variable inequality constraints, *J. Math. Anal. Appl.*, **4** (1962) 291–301.
- [11] R.K. Mehra and R.E. Davis, A generalized gradient method for optimal control problems with inequality constraints and singular arcs, *IEEE. Trans. Automatic Cont.*, **AC-17** (1972) 69–72.
- [12] C. Canuto, M.Y. Hussaini and T.A. Zang, *Spectral Methods in Fluid Dynamics*, Springer, New York, 1988.
- [13] P. Lancaster, *Theory of Matrices*, New York, Academic Press, 1969.
- [14] D.E. Kirk, *Optimal Control Theory*, Englewood Cliffs, NJ, Prentice Hall, 1970.

Special Issue on Space Dynamics

Call for Papers

Space dynamics is a very general title that can accommodate a long list of activities. This kind of research started with the study of the motion of the stars and the planets back to the origin of astronomy, and nowadays it has a large list of topics. It is possible to make a division in two main categories: astronomy and astrodynamics. By astronomy, we can relate topics that deal with the motion of the planets, natural satellites, comets, and so forth. Many important topics of research nowadays are related to those subjects. By astrodynamics, we mean topics related to spaceflight dynamics.

It means topics where a satellite, a rocket, or any kind of man-made object is travelling in space governed by the gravitational forces of celestial bodies and/or forces generated by propulsion systems that are available in those objects. Many topics are related to orbit determination, propagation, and orbital maneuvers related to those spacecrafts. Several other topics that are related to this subject are numerical methods, nonlinear dynamics, chaos, and control.

The main objective of this Special Issue is to publish topics that are under study in one of those lines. The idea is to get the most recent researches and published them in a very short time, so we can give a step in order to help scientists and engineers that work in this field to be aware of actual research. All the published papers have to be peer reviewed, but in a fast and accurate way so that the topics are not outdated by the large speed that the information flows nowadays.

Before submission authors should carefully read over the journal's Author Guidelines, which are located at <http://www.hindawi.com/journals/mpe/guidelines.html>. Prospective authors should submit an electronic copy of their complete manuscript through the journal Manuscript Tracking System at <http://mts.hindawi.com/> according to the following timetable:

Manuscript Due	July 1, 2009
First Round of Reviews	October 1, 2009
Publication Date	January 1, 2010

Lead Guest Editor

Antonio F. Bertachini A. Prado, Instituto Nacional de Pesquisas Espaciais (INPE), São José dos Campos, 12227-010 São Paulo, Brazil; prado@dem.inpe.br

Guest Editors

Maria Cecilia Zanardi, São Paulo State University (UNESP), Guaratinguetá, 12516-410 São Paulo, Brazil; cecilia@feg.unesp.br

Tadashi Yokoyama, Universidade Estadual Paulista (UNESP), Rio Claro, 13506-900 São Paulo, Brazil; tadashi@rc.unesp.br

Silvia Maria Giuliatti Winter, São Paulo State University (UNESP), Guaratinguetá, 12516-410 São Paulo, Brazil; silvia@feg.unesp.br