

Research Article

Weibull Model Allowing Nearly Instantaneous Failures

C. D. Lai, Michael B. C. Khoo, K. Muralidharan, and M. Xie

Received 27 April 2007; Accepted 8 August 2007

Recommended by Paul Cowpertwait

A generalized Weibull model that allows instantaneous or early failures is modified so that the model can be expressed as a mixture of the uniform distribution and the Weibull distribution. Properties of the resulting distribution are derived; in particular, the probability density function, survival function, and the hazard rate function are obtained. Some selected plots of these functions are also presented. An R script was written to fit the model parameters. An application of the modified model is illustrated.

Copyright © 2007 C. D. Lai et al. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

1. Introduction

Many generalizations and extensions of the Weibull distribution have been proposed in reliability literature due to the lack of fits of the traditional Weibull distribution. A summary of these generalizations is given by Pham and Lai [1]. An extensive treatment on Weibull models is given by Murthy et al. [2].

A modified Weibull distribution that allows instantaneous or early failures is introduced by Muralidharan and Lathika [3]. It was pointed out that the occurrence of instantaneous or early (premature) failures in life testing experiment is a phenomenon observed in electronic parts as well as in clinical trials. These occurrences may be due to inferior quality, faulty construction, or nonresponse of the treatments.

It has been shown that the distribution may be represented as a mixture of a singular distribution at zero (or t_0) and a two-parameter Weibull distribution. Because of the singular nature of distribution, we have been unable to define the failure rate (hazard rate) function meaningfully. The aim of this paper is to provide a meaningful modification so that the resulting model can be expressed as a mixture of two continuous distributions. This modified form is more realistic as “true” instantaneous failures rarely occur. The

modification allows us to establish and study the failure rate function of this reliability model via mixture distributions. We also provide some graphical plots to illustrate some possible shapes for the survival functions as well as the failure rate functions.

The present paper focuses on the “nearly instantaneous” failure case as it has fewer parameters. This special case is more realistic than the “early failure” case since many products exhibit an “infant mortality” phenomenon due to initial defects.

2. Representation of the model

Let $F(t)$ and $R(t) = 1 - F(t)$ denote the cumulative distribution function and the survival function of the mixture, respectively. We assume that F is continuous and its density be given by $f(t) = F'(t)$. The component distribution functions and their survival functions are $F_i(t)$ and $R_i(t) = 1 - F_i(t)$, respectively, $i = 1, 2$. The failure rate of a lifetime distribution is defined as $h(t) = f(t)/R(t)$ provided the density exists.

Instead of assuming an instant or an early failure to occur at a particular time point, as in the original model of Muralidharan and Lathika [3], we now represent this model as a mixture of a generalized Dirac delta function and the 2-parameter Weibull as opposed to a mixture of a singular distribution with a Weibull. Thus, the resulting modification gives rise to a density function:

$$f(t) = p\delta_d(t - t_0) + q\alpha\lambda^\alpha t^{\alpha-1} e^{-(\lambda t)^\alpha}, \quad p + q = 1, \quad 0 < p < 1, \tag{2.1}$$

where

$$\delta_d(t - t_0) = \begin{cases} \frac{1}{d}, & t_0 \leq t \leq t_0 + d, \\ 0, & \text{otherwise,} \end{cases} \tag{2.2}$$

for sufficiently small d . Here $p > 0$ is the mixing proportion.

We note that

$$\delta(x - x_0) = \lim_{d \rightarrow 0} \delta_d(x - x_0), \tag{2.3}$$

where $\delta(\cdot)$ is the Dirac delta function. We may view the Dirac delta function as a normal distribution having a zero mean and standard deviation that tends to 0. For a fixed value of d , (2.2) denotes a uniform distribution over an interval $[t_0, t_0 + d]$ so the modified model is now effectively a mixture of a Weibull with a uniform distribution. Instead of including a possible instantaneous failure in the model, (2.2) allows for a possible “near instantaneous” failure to occur uniformly over a very small time interval.

Note that the case $t_0 = 0$ corresponds to instantaneous failures, whereas $t_0 \neq 0$ (but small) corresponds to the case with early failures.

Noting from (2.1) and (2.2), we see that the mixture density function is not continuous at t_0 and $t_0 + d$. However, both the distribution and survival functions are continuous.

Writing $f_1(t) = \delta_d(t - t_0)$ and $f_2(t) = \alpha\lambda^\alpha t^{\alpha-1} e^{-(\lambda t)^\alpha}$, $\alpha, \lambda > 0$; (2.1) can be written as

$$f(t) = pf_1(t) + qf_2(t), \quad p + q = 1, \quad 0 < p < 1, \tag{2.4}$$

so

$$F(t) = pF_1(t) + qF_2(t), \quad (2.5)$$

$$R(t) = 1 - F(t) = p + q - \{pF_1(t) + qF_2(t)\} = pR_1(t) + qR_2(t). \quad (2.6)$$

Thus, the failure (hazard) rate function of the mixture distribution is

$$h(t) = \frac{pf_1(t) + qf_2(t)}{pR_1(t) + qR_2(t)}. \quad (2.7)$$

A mixture distribution involving two 2-parameter Weibull distributions has been thoroughly studied in Jiang and Murthy [4]. The mixture considered in this paper is more complex in the sense that one of the mixing distributions has a finite range which poses some challenges.

Via (2.4) simulated observations from this model are made by generating uniform variates and Weibull variates with proportions p and $q = 1 - p$, respectively.

3. Survival function and failure rate function of the model

Recently, failure rates of mixtures are discussed quite extensively. Lai and Xie [5, Section 2.8] provide a good summary. As demonstrated by Block et al. [6], various shapes of failure rate functions can arise with a mixture of two increasing failure rate distributions. Now, a Weibull has an increasing (decreasing) failure rate if its shape parameter α is greater (smaller) than 1. The uniform distribution also has an increasing failure rate if it is uniform over $[0, a]$. Thus we are interested to know what shapes would result from our model.

The reliability (survival) functions of the respective component distributions are given by

$$R_1(t) = \begin{cases} 1 & \text{if } 0 \leq t < t_0, \\ \frac{d + t_0 - t}{d} & \text{if } t_0 \leq t \leq t_0 + d, \\ 0 & \text{if } t > t_0 + d, \end{cases} \quad (3.1)$$

$$R_2(t) = e^{-(\lambda t)^\alpha}, \quad t \geq 0, \alpha, \lambda > 0. \quad (3.2)$$

The failure rates are, respectively,

$$h_1(t) = \begin{cases} 0, & 0 \leq t < t_0, \\ \frac{1}{d + t_0 - t}, & t_0 \leq t \leq t_0 + d, \\ \infty, & t > t_0 + d, \end{cases} \quad (3.3)$$

$$h_2(t) = \alpha\lambda(\lambda t)^{\alpha-1}. \quad (3.4)$$

It can be shown from (2.4) and (2.6) that for any mixture of two continuous distributions, the failure rate function can be expressed as

$$h(t) = \frac{f(t)}{R(t)} = w(t)h_1(t) + [1 - w(t)]h_2(t), \tag{3.5}$$

where $w(t) = pR_1(t)/R(t)$ for all $t \geq 0$. In our case,

$$w(t) = \begin{cases} \frac{p}{R(t)} & \text{if } 0 \leq t < t_0, \\ \frac{pR_1(t)}{R(t)} & \text{if } 0 \leq t \leq t_0 + d, \\ 0 & \text{if } t > t_0 + d \end{cases} \tag{3.6}$$

with

$$w'(t) = w(t)[1 - w(t)]\{h_2(t) - h_1(t)\}. \tag{3.7}$$

(Note that equation (3.7) is valid for all cases).

Also a simple differentiation shows that

$$h'(t) = w'(t)h_1(t) + w(t)h_1'(t) - w'(t)h_2(t) + [1 - w(t)]h_2'(t). \tag{3.8}$$

Now, $w(t)h_1(t) = pR_1(t)/R(t) \times f_1(t)/R_1(t) = pf_1(t)/R(t)$, so (3.5) is well defined for all $t > 0$.

Summarized expression for $R(t)$ and $h(t)$ are, respectively, given as

$$R(t) = pR_1(t) + qR_2(t) = \begin{cases} p + qe^{-(\lambda t)^\alpha}, & 0 \leq t < t_0, \\ \frac{p(d + t_0 - t)}{d} + qe^{-(\lambda t)^\alpha}, & t_0 \leq t \leq t_0 + d, \\ qe^{-(\lambda t)^\alpha}, & t > t_0 + d, \end{cases} \tag{3.9}$$

$$h(t) = \begin{cases} \left(\frac{qe^{-(\lambda t)^\alpha}}{p + qe^{-(\lambda t)^\alpha}} \right) \alpha \lambda^\alpha t^{\alpha-1}, & 0 \leq t < t_0, \\ \frac{p + dqe^{-(\lambda t)^\alpha} \alpha \lambda^\alpha t^{\alpha-1}}{p(d + t_0 - t) + dqe^{-(\lambda t)^\alpha}}, & t_0 \leq t \leq t_0 + d, \\ \alpha \lambda^\alpha t^{\alpha-1}, & t > t_0 + d. \end{cases} \tag{3.10}$$

Recall that $h(t)$ is discontinuous at both $t = t_0$ and $t = t_0 + d$. Unlike the model of Muralidharan and Lathika [3], the survival function is continuous though not differentiable at $t = t_0$ and $t = t_0 + d$.

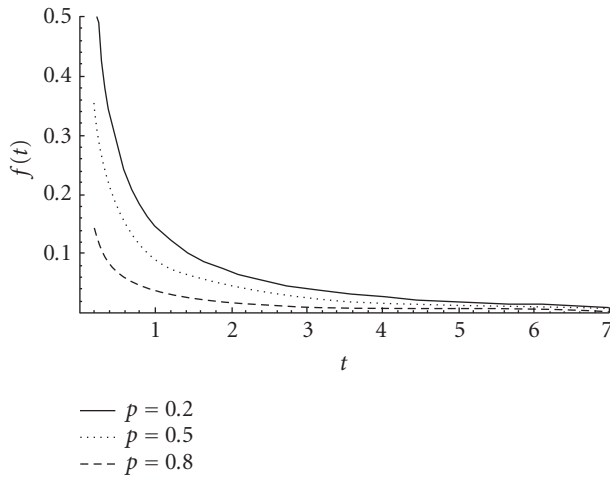


FIGURE 4.1. Plot of $f(t) : \lambda = 1, \alpha = 0.5, d = 0.2, t_0 = 0$.

4. Nearly instantaneous failure case ($t_0 = 0$)

Consider a special case of the model (2.1) whereby $t_0 = 0$. The model may be called the Weibull with “nearly instantaneous failure” model.

In this case, (3.3) is simplified giving the failure rate of the uniform distribution as

$$h_1(t) = \begin{cases} \frac{1}{d-t}, & 0 \leq t \leq d, \\ \infty, & t > d, \end{cases} \tag{4.1}$$

and (3.1) its survival function is given as

$$R_1(t) = \begin{cases} \frac{d-t}{d} & \text{if } 0 \leq t \leq d, \\ 0 & \text{if } t > d. \end{cases} \tag{4.2}$$

The Weibull model with “nearly instantaneous failure” occurring uniformly over $[0, d]$ has

$$R(t) = \begin{cases} \frac{p(d-t)}{d} + qe^{-(\lambda t)^\alpha}, & 0 \leq t \leq d, \\ qe^{-(\lambda t)^\alpha}, & t > d, \end{cases} \tag{4.3}$$

$$h(t) = \begin{cases} \frac{p + dqe^{-(\lambda t)^\alpha} \alpha \lambda^\alpha t^{\alpha-1}}{p(d-t) + dqe^{-(\lambda t)^\alpha}}, & 0 \leq t \leq d, \\ \alpha \lambda^\alpha t^{\alpha-1}, & t > d. \end{cases} \tag{4.4}$$

Graphs of Survival, Density, and Failure Rate Functions. Graphical plots are important for ageing distributions. It is not the aim of this paper to present complete characterizations

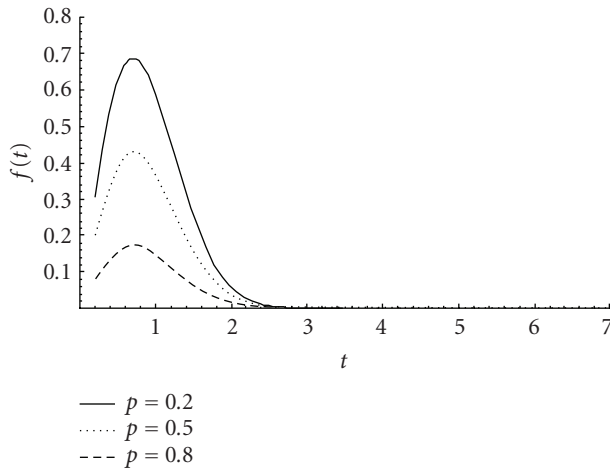


FIGURE 4.2. Plot of $f(t) : \lambda = 1, \alpha = 2, d = 0.2, t_0 = 0$.

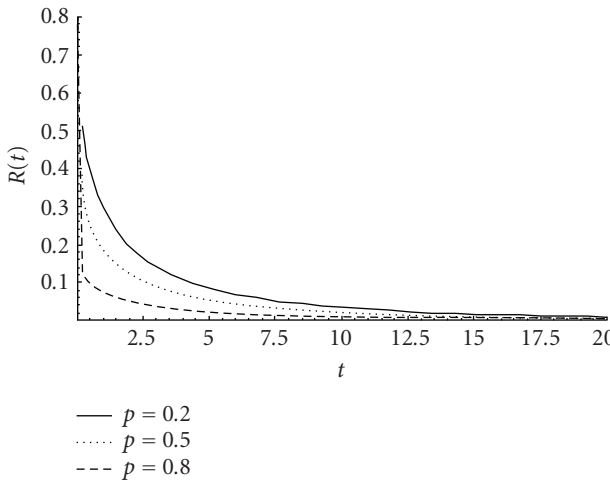


FIGURE 4.3. Plot of $R(t) : \lambda = 1, \alpha = 0.5, d = 0.2, t_0 = 0$.

for the survival, density, and the failure rate functions. Instead, snapshots are taken of some possible shapes from this model, as it is important to identify whether the model is useful for specific datasets for which empirical plots are available.

Consider in detail the special case when $t_0 = 0$, that is, the Weibull with “nearly” instantaneous failure model.

Density functions. In both Figures 4.1 and 4.2, three density functions with $p = 0.2, 0.5$, and 0.8 are plotted. In all figures, the smallest mixing proportion p is given by the solid line.

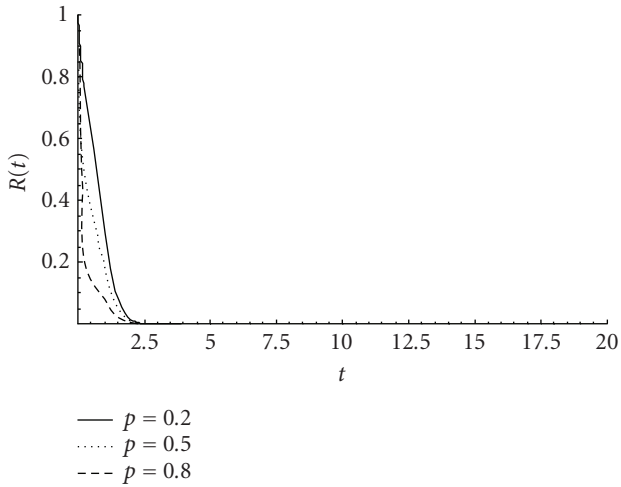


FIGURE 4.4. Plot of $R(t) : \lambda = 1, \alpha = 2, d = 0.2, t_0 = 0$.

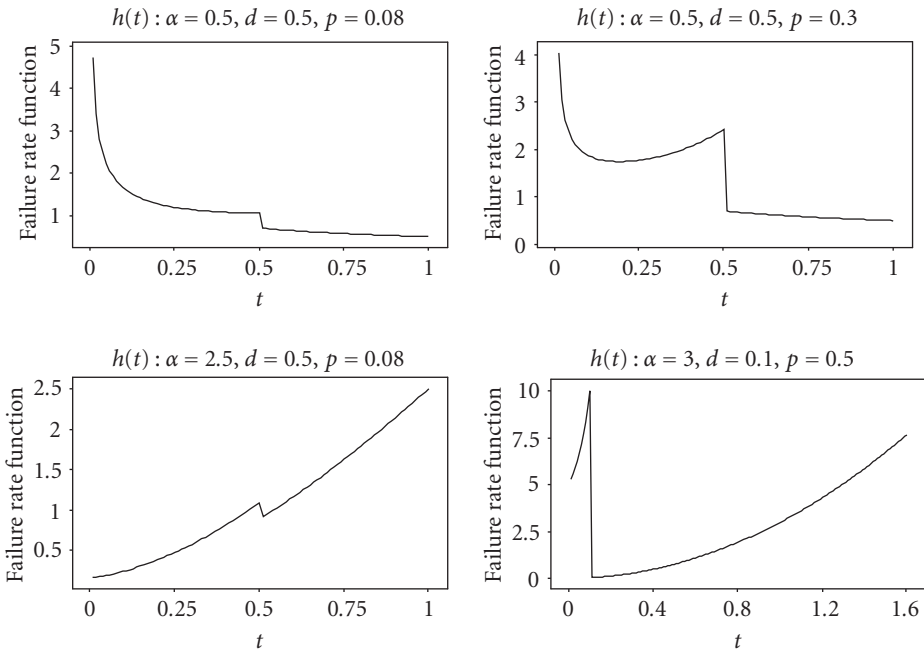


FIGURE 4.5. Plots of failure rate functions.

Survival functions. The survival functions are given by Figures 4.3 and 4.4 which correspond to the density functions in Figures 4.1 and 4.2, respectively.

Failure rate functions. The failure rate function $h(t)$ is given as in (4.4). Clearly, its shape is the same as the Weibull failure rate after d . Thus we focus on the segment from 0 to d .

TABLE 5.1. Instantaneous failures at $t_i = 0, i = 1, 2, \dots, 28$.

	\hat{p}	$\hat{\alpha}$	$1/\hat{\lambda}$
Estimates	0.6999992	1.1929632	0.9315360
Standard error	0.07244318	0.28878116	0.23615878

Since the scale parameter λ does not alter the shape, it is set to one. Figure 4.5 shows that $h(t)$ can be increasing, decreasing, or bathtub shaped for $0 \leq t \leq d$.

From the plots, it can be seen that the failure rate function of the model gives rise to several different shapes and bumps; this is expected as mixing distributions with a component distribution that has a finite range often cause some problems. Although the second part can be either increasing or decreasing, the first segment can achieve various shapes. This finding is consistent with Block et al. [6].

5. Data fitting and an application

Mixture distributions are used widely in the statistics literature. Bebbington et al. [7] have used a mixture of two generalized Weibull distributions to fit human mortality data. A mixture distribution may give rise to different failure rate thus it can provide pseudo-demarcation of various phases of a lifespan. Bebbington et al. [7] also use their mixture distribution to identify the differences between (sub)populations.

While software for fitting mixture distributions is available, such as the MIX package for the R environment (Macdonald [8]), such packages do not handle uniform distributions, or mixtures of unlike distributions.

To fit the model to a dataset, an R script was written. One can write a code in R to fit all 4 parameters (p, λ, α, d) and another to fit 3 parameters (p, λ, α) with d given and held fixed. The second case always works, and works very well, but the first never gives good results when the edge of the uniform (parameter d) is inside the peak of the Weibull (personal communication with Professor Macdonald). This is because there is not enough information in the data to fit the 4th parameter in this situation. In practice, the value of d can be manually estimated quite accurately from the dataset.

5.1. Application. A sample of 40 boards of woods were checked for their dryness on a particular area of a board. The actual observations were degrees of dryness measured as a percentage. This dataset was analysed in Muralidharan and Lathika [3] with $t_i = 0, i = 1, 2, \dots, 28$ and the other positive observations are as follows: 0.0463741, 0.0894855, 0.4, 0.42517, 0.623441, 0.6491, 0.73346, 1.35851, 1.77112, 1.86047, 2.12125, 2.12389.

Treating the degree of dryness as the “failure time,” we apply the Weibull model with “nearly instantaneous” failures model to this data (see Table 5.1).

It is reasonable to spread the zeros uniformly over an interval $[0, d)$. For illustration, we select $d = 0.135$ so that $t_1 = 0, t_2 = 0.0005, t_3 = 0.001, \dots, t_{28} = 0.0135$. Applying the MLE method in R, we found the following see Table 5.2.

It seems to us the sizes of standard errors of the three estimates are reasonable in view of a small sample size.

TABLE 5.2. Uniform spread of “nearly” instantaneous failure times.

	\hat{p}	$\hat{\alpha}$	$1/\hat{\lambda}$
Estimates	0.6981846	1.1656527	0.9431262
Standard error	0.07292797	0.30176818	0.24822803

TABLE 5.3. Exponential with “nearly” instantaneous failures: $d = 0.0135$.

	\hat{p}	$1/\hat{\lambda}$
v1–estimates (se)	0.6959071 (0.0734413)	1.0031716 (0.2896755)
v2–estimates (se)	0.6959356 (0.07343414)	1.0033558 (0.28970177)

Since the shape parameter $\hat{\alpha} = 1.16$ and the fact that three parameters are being estimated from few data points, it would be more realistic to specify $\alpha = 1$ *a priori* (i.e., an exponential) as a special case of the Weibull model. This would reduce the number of parameters and therefore the uncertainty in the parameter estimates. Table 5.3 summarizes the parameter estimates of the exponential mixing with the uniform model.

Note. v1 consists of of measurements from the original dataset. The 28 zeros in v1 are then calibrated to spread over uniformly over $[0, d]$. v2 is formed by replacing the first 28 cells of v1 by the calibrated values.

We note from the preceding table that the precision for the second parameter estimate actually deteriorates in comparison with the Weibull case. Perhaps the Akaike information criteria (AIC) or BIC would be a more objective way to evaluate this comparison.

5.2. Sensitivity analysis. In the above model fitting, we have chosen d manually and the value $d = 0.0135$ is chosen because it is sufficiently apart from the first nonzero observed value 0.0463741. We have assessed the sensitivity of the selection of the parameter d . For the “instantaneous” failures case, we let d vary between 0.01 and 0.04; the resulting estimates and their standard errors are virtually unchanged. However, it becomes sensitive when d is too close to $t = 0$ or to the first Weibull failure time $t = 0.0463741$. If d is set to 0.135, the parameter estimates are then given by $\hat{p} = 0.7497827$, $\hat{\alpha} = 1.8827550$, and $1/\hat{\lambda} = 0.7327841$ indicating that these estimates change noticeably as d encroaches on the Weibull “territory.” It also shows that for this value of d , the model with the uniform mixing with the exponential can longer be an alternative because the estimate for the shape parameter α is now close to 2.

6. Conclusion

The Weibull distribution has been widely used as a life model in reliability applications. However, one often finds that it does not fit well in the early part of a lifespan for various reasons. In particular, in the cases where initial defects are present causing early failures, the Weibull distribution is found inadequate to model such phenomenon. The proposed model of a modified Weibull mixing with a uniform distribution to model the first phase of a lifespan should provide a useful alternative.

Appendix

R code for fitting the model

```

v1<-rep(0,40)
v1[29:40]<-c(0.0463741,0.0894855,0.4,0.42517,0.623441,0.6491,
            0.73346,1.35851,1.77112,1.86047,2.12125,2.12389)
v2 <- c(0, 0.0005, 0.001, 0.0015, 0.002, 0.0025, 0.003, 0.0035,
0.004, 0.0045, 0.005, 0.0055, 0.006, 0.0065, 0.007, 0.0075, 0.008,
0.0085, 0.009, 0.0095, 0.01, 0.0105, 0.011, 0.0115, 0.012, 0.0125,
0.013, 0.0135, 0.046374, 0.089486, 0.4, 0.42517, 0.623441, 0.6491,
0.73346, 1.35851, 1.77112, 1.86047, 2.12125, 2.12389)

uniweib <-cbind(v1, v2)

neglluniweib<-function(p,x,d){
  pp<-p[1]
  shape<-p[2]
  rate<-p[3]
  if(pp>0 & shape>0 & rate>0 & pp<1) {
    -sum(log(pp*dunif(x,0,d)+(1- pp)*dweibull(x,shape,1/rate)))
  }else{
    1e+200
  }
}

uniweibmle <- function(d,prop,shape,rate,x) {
  p<-c(prop,shape,rate)
  fit<-nlm(neglluniweib,p=p,x=x,d=d,hessian=T)
  fit$se<-sqrt(diag(solve(fit$hessian)))
  fit[c(1,2,7,3,4,5,6)]
}

uniweibmle(0.0135,0.1,2,1,v1) uniweibmle(0.0135,0.1,2,1,v2)

```

Acknowledgments

The first author is privileged to have been a former student and a colleague of Professor Jeff Hunter, who has been an inspiration to many. The authors wish him well in his retirement. The authors are very grateful to Professor Peter Macdonald who helped them to write an R script for the model and to the referees for their helpful comments. The authors also wish to acknowledge Dr. K. Govindaraju for his help to improve the quality of the figures.

References

- [1] H. Pham and C. D. Lai, "On recent generalizations of the Weibull distribution," *IEEE Transactions on Reliability*, vol. 54, no. 3, pp. 454–458, 2007.
- [2] D. N. P. Murthy, M. Xie, and R. Jiang, *Weibull Models*, Wiley Series in Probability and Statistics, John Wiley & Sons, Hoboken, NJ, USA, 2004.
- [3] K. Muralidharan and P. Lathika, "Analysis of instantaneous and early failures in Weibull distribution," *Metrika*, vol. 64, no. 3, pp. 305–316, 2006.
- [4] R. Jiang and D. N. P. Murthy, "Mixture of Weibull distributions—parametric characterization of failure rate function," *Applied Stochastic Models and Data Analysis*, vol. 14, no. 1, pp. 47–65, 1998.
- [5] C. D. Lai and M. Xie, *Stochastic Ageing and Dependence for Reliability*, Springer, New York, NY, USA, 2006.
- [6] H. W. Block, Y. Li, and T. H. Savits, "Initial and final behaviour of failure rate functions for mixtures and systems," *Journal of Applied Probability*, vol. 40, no. 3, pp. 721–740, 2003.
- [7] M. Bebbington, C. D. Lai, and R. Zitikis, "Modeling human mortality using mixtures of bathtub shaped failure distributions," *Journal of Theoretical Biology*, vol. 245, no. 3, pp. 528–538, 2007.
- [8] P. D. M. Macdonald, "MIX for the R Environment," distributed by ICHTHUS DATA SYSTEMS, <http://www.math.mcmaster.ca/peter/mix/mix.html>.

C. D. Lai: Institute of Information Sciences and Technology, Massey University,
Palmerston North, New Zealand
Email address: c.lai@massey.ac.nz

Michael B. C. Khoo: School of Mathematical Sciences, Universiti Sains Malaysia,
11800 Pulau Pinang, Malaysia
Email address: mkbc@usm.my

K. Muralidharan: Department of Statistics, The Maharaja Sayajirao University of Baroda,
Vadodara 390 002, India
Email address: lmv_murali@yahoo.com

M. Xie: Department of Industrial and Systems Engineering, National University of Singapore,
Singapore 119077
Email address: mxie@nus.edu.sg

Special Issue on Space Dynamics

Call for Papers

Space dynamics is a very general title that can accommodate a long list of activities. This kind of research started with the study of the motion of the stars and the planets back to the origin of astronomy, and nowadays it has a large list of topics. It is possible to make a division in two main categories: astronomy and astrodynamics. By astronomy, we can relate topics that deal with the motion of the planets, natural satellites, comets, and so forth. Many important topics of research nowadays are related to those subjects. By astrodynamics, we mean topics related to spaceflight dynamics.

It means topics where a satellite, a rocket, or any kind of man-made object is travelling in space governed by the gravitational forces of celestial bodies and/or forces generated by propulsion systems that are available in those objects. Many topics are related to orbit determination, propagation, and orbital maneuvers related to those spacecrafts. Several other topics that are related to this subject are numerical methods, nonlinear dynamics, chaos, and control.

The main objective of this Special Issue is to publish topics that are under study in one of those lines. The idea is to get the most recent researches and published them in a very short time, so we can give a step in order to help scientists and engineers that work in this field to be aware of actual research. All the published papers have to be peer reviewed, but in a fast and accurate way so that the topics are not outdated by the large speed that the information flows nowadays.

Before submission authors should carefully read over the journal's Author Guidelines, which are located at <http://www.hindawi.com/journals/mpe/guidelines.html>. Prospective authors should submit an electronic copy of their complete manuscript through the journal Manuscript Tracking System at <http://mts.hindawi.com/> according to the following timetable:

Manuscript Due	July 1, 2009
First Round of Reviews	October 1, 2009
Publication Date	January 1, 2010

Lead Guest Editor

Antonio F. Bertachini A. Prado, Instituto Nacional de Pesquisas Espaciais (INPE), São José dos Campos, 12227-010 São Paulo, Brazil; prado@dem.inpe.br

Guest Editors

Maria Cecilia Zanardi, São Paulo State University (UNESP), Guaratinguetá, 12516-410 São Paulo, Brazil; cecilia@feg.unesp.br

Tadashi Yokoyama, Universidade Estadual Paulista (UNESP), Rio Claro, 13506-900 São Paulo, Brazil; tadashi@rc.unesp.br

Silvia Maria Giuliatti Winter, São Paulo State University (UNESP), Guaratinguetá, 12516-410 São Paulo, Brazil; silvia@feg.unesp.br