

# Burgers' Equation with Nonlinear Boundary Feedback: $H^1$ Stability, Well-Posedness and Simulation

ANDRAS BALOGH<sup>†</sup> and MIROSLAV KRSTIĆ\*

*Department of AMES, University of California at San Diego,  
La Jolla, CA 92093-0411, USA*

*(Received 17 June 1999)*

We consider the viscous Burgers' equation under recently proposed nonlinear boundary conditions and show that it guarantees global asymptotic stabilization and semiglobal exponential stabilization in  $H^1$  sense. Our result is global in time and allows arbitrary size of initial data. It strengthens recent results by Byrnes, Gilliam, and Shubov, Ly, Mease, and Titi, and Ito and Yan. The global existence and uniqueness of classical solutions follows from the general theory of quasi-linear parabolic equations. We include a numerical result which illustrates the performance of the boundary controller.

*Keywords:* Burgers' equation; Nonlinear boundary feedback; Global stability; Regularity

*AMS Subject Classification:* 93D20, 35B35, 35Q53

## 1 INTRODUCTION

Burgers' equation is a natural first step towards developing methods for control of flows. Recent references by Burns and Kang [1], Byrnes *et al.* [3,4], Ly *et al.* [12], and Ito and Yan [8] achieve progress in local stabilization and global analysis of attractors. The problem of global exponential stabilization in  $L^2$  norm was first addressed by Krstić [9].

---

\* Corresponding author. Tel.: 619-822-2406; 619-822-1374. Fax: 619-534-7078.  
E-mail: [krstic@ucsd.edu](mailto:krstic@ucsd.edu); <http://www-ames.ucsd.edu/research/krstic>.

<sup>†</sup> E-mail: [abalogh@ames.ucsd.edu](mailto:abalogh@ames.ucsd.edu).

This problem is non-trivial because for large initial conditions the quadratic (convective) term – which is negligible in a linear/local analysis – dominates the dynamics. Linear boundary conditions do not always ensure global exponential stability [4] or prevent finite blow-up [5] in the case of nonlinear reaction–diffusion equations. Nonlinear boundary conditions might cause finite blow-up [11], even for the simple heat equation [7].

With the introduction of cubic Neumann boundary feedback control we obtain a closed loop system which is globally asymptotically stable and semi-globally exponentially stable in  $H^1$  norm and, hence in maximum norm whenever the initial data is compatible with the equation and the boundary conditions.

For clarity, our treatment does not include external forcing as in [3,4,8,12]. External forcing would preclude equilibrium stability but one could still establish appropriate forms of disturbance attenuation and regularity of solution.

## 2 PROBLEM STATEMENT AND MAIN RESULTS

Consider Burgers' equation

$$W_t - \epsilon W_{xx} + WW_x = 0, \quad (2.1)$$

where  $\epsilon > 0$  is a constant, with some initial data

$$W(x, 0) = W_0(x). \quad (2.2)$$

Our objective is to achieve set point regulation

$$\lim_{t \rightarrow \infty} W(x, t) = W_d, \quad \forall x \in [0, 1], \quad (2.3)$$

where  $W_d$  is a constant, while keeping  $W(x, t)$  bounded for all  $(x, t) \in [0, 1] \times [0, \infty)$ . Without loss of generality we assume that  $W_d \geq 0$ . By defining the regulation error as  $w(x, t) = W(x, t) - W_d$ , we get the system

$$w_t - \epsilon w_{xx} + W_d w_x + w w_x = 0, \quad (2.4)$$

with initial data

$$w(x, 0) = W_0(x) - W_d \equiv w_0(x). \quad (2.5)$$

We will approach the problem using nonlinear Neumann boundary control proposed in [9]

$$w_x(0, t) = \frac{1}{\epsilon} \left( c_0 + \frac{W_d}{2} + \frac{1}{9c_0} w^2(0, t) \right) w(0, t), \quad (2.6)$$

$$w_x(1, t) = -\frac{1}{\epsilon} \left( c_1 + \frac{1}{9c_1} w^2(1, t) \right) w(1, t), \quad (2.7)$$

where  $c_0, c_1 > 0$ .

The choice of  $w_x$  at the boundary as the control input is motivated by physical considerations. For example, in thermal problems one cannot actuate the temperature  $w$ , but only the heat flux  $w_x$ . This makes the stabilization problem non-trivial because, as Byrnes *et al.* [3] argue, homogeneous Neumann boundary conditions make any constant profile an equilibrium solution, thus preventing not only global but even local *asymptotic* stability. Even mixed linear boundary conditions can introduce multiple stationary solutions [2].

**DEFINITION 1** *The zero solution of a dynamical system is said to be globally asymptotically stable in an  $\mathcal{L}$  spatial norm if*

$$\|w(t)\|_{\mathcal{L}} \leq \beta(\|w_0\|_{\mathcal{L}}, t), \quad \forall t \geq 0, \quad (2.8)$$

where  $\beta(\cdot, \cdot)$  is a class  $\mathcal{KL}$  function, i.e., a function with the properties that

- for fixed  $t$ ,  $\beta(r, t)$  is a monotonically increasing continuous function of  $r$  such that  $\beta(0, t) \equiv 0$ ;
- for fixed  $r$ ,  $\beta(r, t)$  is a monotonically decreasing continuous function of  $t$  such that  $\lim_{t \rightarrow \infty} \beta(r, t) \equiv 0$ .

The trivial solution is said to be globally exponentially stable when

$$\beta(r, t) = kr e^{-\delta t} \quad (2.9)$$

for some  $k, \delta > 0$  independent of  $r$  and  $t$ , and it is said to be semi-globally exponentially stable when

$$\beta(r, t) = K(r) e^{-\delta t}, \quad (2.10)$$

where  $K(r)$  is a continuous nondecreasing function with  $K(0) = 0$ .

We use the following  $H^1$ -like norm in our stability analysis

$$\|w(t)\|_B = \sqrt{w(0, t)^2 + w(1, t)^2 + \|w_x(t)\|^2}. \quad (2.11)$$

We refer to [10] for the definition of Hölder type function spaces  $\mathcal{H}^l([0, 1])$  and  $\mathcal{H}^{l, l/2}([0, 1] \times [0, T])$ , where  $l > 0$  is typically noninteger. Smooth solutions of system (2.4), (2.6), (2.7) should clearly be compatible with the boundary conditions at  $t=0$  in some sense. For the definition of compatibility conditions of different order we refer to [10] again.

Our main result is the following theorem.

**THEOREM 1** *Consider the system (2.4), (2.6), (2.7). For any  $T > 0$ ,  $l > 0$ , and for any  $w_0 \in \mathcal{H}^{2+l}([0, 1])$  satisfying the compatibility condition of order  $[(l+1)/2]$  there exists a unique classical solution  $w(x, t) \in \mathcal{H}^{2+l, 1+l/2}([0, 1] \times [0, T]) \subset C^{2,1}([0, 1] \times [0, T])$  with the following stability properties.*

- (1) *Global exponential stability in the  $L^q$  sense: for any  $q \in [2, \infty)$  there exists  $\delta(q) > 0$  such that*

$$\|w(t)\|_{L^q} \leq \|w_0\|_{L^q} e^{-\delta t}, \quad \forall t \geq 0. \quad (2.12)$$

- (2) *Global asymptotic and semi-global exponential stability in the  $H^1$  sense: there exist  $k, \delta \in (0, \infty)$  such that*

$$\|w(t)\|_B \leq k \|w_0\|_B e^{k \|w_0\|_B^2} e^{-\delta t}, \quad \forall t \geq 0. \quad (2.13)$$

Since  $\mathcal{H}^n = C^n$  for  $n$  integer, the theorem assumes initial data smoother than  $C^2$  (but not necessarily as smooth as  $C^3$ ). Specifically,

the initial data need to satisfy

$$\sup_{x,y \in [0,1]} \frac{|w_0''(x) - w_0''(y)|}{|x - y|^l} < \infty \quad (2.14)$$

for some  $l > 0$ .

For solutions to be classical, besides  $C^{2+}$  smoothness of initial data, it is required that they satisfy the compatibility condition of order zero, i.e.,

$$w_0'(0) = \frac{1}{\epsilon} \left( c_0 + \frac{W_d}{2} + \frac{1}{9c_0} w_0^2(0) \right) w_0(0), \quad (2.15)$$

$$w_0'(1) = -\frac{1}{\epsilon} \left( c_1 + \frac{1}{9c_1} w_0^2(1) \right) w_0(1). \quad (2.16)$$

### 3 GLOBAL ASYMPTOTIC STABILITY

While irrelevant for finite-dimensional systems where all vector norms are equivalent, for PDEs, the question of the type of norm  $\mathcal{L}$  with respect to which one wants to establish stability is a delicate one. Any meaningful stability claim should imply boundedness of solutions. We first establish global exponential stability in  $L^q$  for any  $q \in [2, \infty)$ , which does not guarantee boundedness. Then we show global asymptotic (plus local exponential) stability in an  $H^1$ -like sense which, by combining Agmon's and Poincaré's inequalities, guarantees boundedness.

Consider the Lyapunov function

$$V(w(t)) = \int_0^1 w^{2p} dx = \|w^p(t)\|^2 = \|w(t)\|_{L^{2p}}^{2p}, \quad p \geq 1. \quad (3.1)$$

Its time derivative is

$$\begin{aligned} \dot{V} &= 2p \int_0^1 w^{2p-1} (\epsilon w_{xx} - W_d w_x - w w_x) dx \\ &= 2p \left[ -\epsilon(2p-1) \int_0^1 w^{2p-2} w_x^2 dx \right. \\ &\quad \left. + \epsilon w^{2p-1} w_x \Big|_0^1 - \frac{W_d}{2p} w^{2p} \Big|_0^1 - \frac{1}{2p+1} w^{2p+1} \Big|_0^1 \right] \end{aligned}$$

$$\begin{aligned}
&= -\epsilon 2p(2p-1) \|w^{p-1}(t)w_x(t)\|^2 \\
&\quad - 2pw^{2p}(0,t) \left[ c_0 + \left(1 - \frac{1}{p}\right) \frac{W_d}{2} - \frac{1}{2p+1} w(0,t) + \frac{1}{9c_0} w^2(0,t) \right] \\
&\quad - 2pw^{2p}(1,t) \left[ c_1 + \frac{W_d}{2p} + \frac{1}{2p+1} w(1,t) + \frac{1}{9c_1} w^2(1,t) \right] \\
&\leq -\epsilon 2p(2p-1) \|w^{p-1}(t)w_x(t)\|^2 - 2p \left[ \frac{w^{2p}(0,t)}{c_0} \left( \frac{c_0^2}{2} + \frac{w^2(0,t)}{18} \right) \right. \\
&\quad \left. + \frac{w^{2p}(1,t)}{c_1} \left( \frac{c_1^2}{2} + \frac{w^2(1,t)}{18} \right) \right]. \tag{3.2}
\end{aligned}$$

From Poincaré's inequality it follows that

$$\|w^p(t)\|^2 \leq 2(w^{2p}(0,t) + w^{2p}(1,t)) + (2p)^2 \|w^{p-1}(t)w_x(t)\|^2. \tag{3.3}$$

Thus we get

$$\dot{V} \leq -\frac{2p-1}{2p} \epsilon' V, \tag{3.4}$$

where  $\epsilon' = \min\{\epsilon, c_0, c_1\}$ . It then follows that

$$\|w(t)\|_{L^{2p}} \leq e^{-((2p-1)/(2p)^2)\epsilon' t} \|w_0\|_{L^{2p}}. \tag{3.5}$$

Thus the solution  $w(x,t) \equiv 0$  is globally exponentially stable in an  $L^q$  sense for any  $q \in [2, \infty)$ . Letting  $p \rightarrow \infty$  in (3.5), we get

$$\operatorname{ess\,sup}_{x \in [0,1]} |w(x,t)| \leq \operatorname{ess\,sup}_{x \in [0,1]} |w(x,0)|, \quad \forall t \geq 0. \tag{3.6}$$

This result is not particularly useful for two reasons:

- (1) The above estimate does not guarantee convergence to zero (it guarantees stability but not *asymptotic* stability).
- (2) Without additional effort to establish continuity, with  $\operatorname{ess\,sup}$  we cannot guarantee boundedness for all (but only for *almost* all)  $x \in [0, 1]$ .

For this reason, we turn our attention to the norm defined in (2.11). By combining Agmon's and Poincaré's inequalities, it is easy to see that

$$\max_{x \in [0,1]} |w(x, t)| \leq \sqrt{2} \|w(t)\|_B. \quad (3.7)$$

We will now prove global asymptotic stability in the sense of the  $B$ -norm. Let us start by rewriting (3.2) for  $p = 1$  as

$$k \frac{d}{dt} \|w(t)\|^2 + \|w(t)\|_B^2 \leq 0, \quad (3.8)$$

where  $k$  is a generic positive constant independent of initial data and time, and by writing (3.5) as

$$\|w(t)\|^2 \leq e^{-t/k} \|w_0\|^2. \quad (3.9)$$

Multiplying (3.8) by  $e^{t/(2k)}$ , we get

$$\begin{aligned} k \frac{d}{dt} (e^{t/(2k)} \|w(t)\|^2) + e^{t/(2k)} \|w(t)\|_B^2 &\leq \frac{1}{2} e^{t/(2k)} \|w(t)\|^2 \\ &\leq \frac{1}{2} e^{-t/(2k)} \|w_0\|^2. \end{aligned} \quad (3.10)$$

Integrating from 0 to  $t$  yields

$$\int_0^t e^{\delta\tau} \|w(\tau)\|_B^2 d\tau \leq k \|w_0\|^2, \quad (3.11)$$

where  $\delta = 1/(2k) > 0$ .

Now we take the  $L^2$ -inner product of (2.4) with  $-w_{xx}$ ,

$$-\int_0^1 w_t w_{xx} dx + \epsilon \int_0^1 w_{xx}^2 dx - W_d \int_0^1 w_x w_{xx} dx - \int_0^1 w w_x w_{xx} dx = 0. \quad (3.12)$$

The estimation of the various terms follows:

$$\begin{aligned}
 & - \int_0^1 w_t w_{xx} \, dx \\
 &= -w_t w_x|_0^1 + \int_0^1 w_{xt} w_x \, dx \\
 &= \frac{1}{2} \frac{d}{dt} \|w_x(t)\|^2 + \frac{w_t(1, t)}{\epsilon} \left( c_1 w(1, t) + \frac{1}{9c_1} w^3(1, t) \right) \\
 &\quad + \frac{w_t(0, t)}{\epsilon} \left( c_0 w(0, t) + \frac{W_d}{2} w(0, t) + \frac{1}{9c_0} w^3(0, t) \right) \\
 &= \frac{1}{2} \frac{d}{dt} \left( \frac{c_1}{\epsilon} w^2(1, t) + \frac{1}{18c_1\epsilon} w^4(1, t) + \frac{(2c_0 + W_d)}{2\epsilon} w^2(0, t) \right. \\
 &\quad \left. + \frac{1}{18c_0\epsilon} w^4(0, t) + \|w_x(t)\|^2 \right), \tag{3.13}
 \end{aligned}$$

$$W_d \int_0^1 w_x w_{xx} \, dx \leq W_d \|w_x(t)\| \|w_{xx}(t)\| \leq \frac{W_d^2}{\epsilon} \|w_x(t)\|^2 + \frac{\epsilon}{4} \|w_{xx}(t)\|^2, \tag{3.14}$$

$$\begin{aligned}
 \int_0^1 w w_x w_{xx} \, dx &\leq \|w(t)\|_{L^\infty} \int_0^1 |w_x w_{xx}| \, dx \\
 &\leq \|w(t)\|_{L^\infty} \|w_x(t)\| \|w_{xx}(t)\| \\
 &\leq \frac{1}{\epsilon} \|w(t)\|_{L^\infty}^2 \|w_x(t)\|^2 + \frac{\epsilon}{4} \|w_{xx}(t)\|^2 \\
 &\leq \frac{2}{\epsilon} \|w_x(t)\|^2 \|w(t)\|_B^2 + \frac{\epsilon}{4} \|w_{xx}(t)\|^2. \tag{3.15}
 \end{aligned}$$

Using the notation

$$\begin{aligned}
 A(t) &= \frac{c_1}{\epsilon} w^2(1, t) + \frac{1}{18c_1\epsilon} w^4(1, t) + \frac{(2c_0 + W_d)}{2\epsilon} w^2(0, t) \\
 &\quad + \frac{1}{18c_0\epsilon} w^4(0, t) + \|w_x(t)\|^2, \tag{3.16}
 \end{aligned}$$

and substituting (3.13)–(3.15) into (3.12) we obtain

$$\frac{1}{2} \frac{d}{dt} A(t) + \frac{\epsilon}{2} \|w_{xx}(t)\|^2 \leq \frac{W_d^2}{\epsilon} \|w(t)\|_B^2 + \frac{2}{\epsilon} \|w(t)\|_B^4, \tag{3.17}$$



and hence

$$\dot{A}(t) \leq k\|w(t)\|_B^2 + k\|w(t)\|_B^2 A(t). \quad (3.18)$$

Multiplying by  $e^{\delta t}$  we get

$$\begin{aligned} \frac{d}{dt}(e^{\delta t} A(t)) &\leq k e^{\delta t} \|w(t)\|_B^2 + \delta e^{\delta t} A + k \|w(t)\|_B^2 e^{\delta t} A(t) \\ &\leq k e^{\delta t} \|w\|_B^2 + k \|w\|_B^2 e^{\delta t} A(t). \end{aligned} \quad (3.19)$$

By Gronwall's inequality, we get

$$\begin{aligned} e^{\delta t} A(t) &\leq \left[ A(0) + k \int_0^t e^{\delta \tau} \|w(\tau)\|_B^2 d\tau \right] e^{k \int_0^t \|w(\tau)\|_B^2 d\tau} \\ &\leq [A(0) + k\|w_0\|^2] e^{k\|w_0\|^2}. \end{aligned} \quad (3.20)$$

Thus

$$\begin{aligned} A(t) &\leq (A(0) + k\|w_0\|^2) e^{k\|w_0\|^2} e^{-\delta t} \\ &\leq k(\|w_0\|_B^2 + \|w_0\|_B^4) e^{k\|w_0\|_B^2} e^{-\delta t} \\ &\leq k\|w_0\|_B^2 e^{k\|w_0\|_B^2} e^{-\delta t}, \end{aligned} \quad (3.21)$$

which implies

$$\|w(t)\|_B \leq k\|w_0\|_B e^{k\|w_0\|_B^2} e^{-\delta t/2}. \quad (3.22)$$

This proves global asymptotic stability in the sense of the  $B$ -norm with  $\beta(r, t) = kre^{kr^2} e^{-\delta t/2}$ . It also shows semi-global exponential stability. The last estimate also guarantees that

$$\sup_{t \geq 0} \max_{x \in [0, 1]} |w(x, t)| < \infty \quad (3.23)$$

whenever  $w(0, 0)$ ,  $w(1, 0)$ , and  $\int_0^1 w_x(x, 0)^2 dx$  are finite.

The existence of classical solutions follows from Theorem 7.4 in [10], Chapter V. This Theorem establishes, for a more general quasi-linear parabolic boundary value problem, the existence of a unique solution

in the Hölder space of functions  $\mathcal{H}^{2+l,1+l/2}([0, 1] \times [0, T])$  for some  $l > 0$ . Since  $\mathcal{H}^{2+l,1+l/2}([0, 1] \times [0, T]) \subset C^{2,1}([0, 1] \times [0, T])$ , we obtain the existence of *classical* solutions for time intervals  $[0, T]$ , where  $T > 0$  is arbitrarily large. The proof in [10] is based on linearization of the system, and on application of the Leray–Schauder theorem on fixed points. It is important to note that a crucial step in the proof is establishing uniform *a priori* estimates for the system. These estimates are for the Hölder norms of solutions and hence are different from our Sobolev type energy estimates. The Hölder estimates establish boundedness of solutions, while our energy estimates establish stability. The existence of strong (but not necessarily classical) solutions was proved in [8] using a different method.

#### 4 SIMULATION EXAMPLE

It is well known (see, e.g. [2,6]) that nonlinear problems, especially fluid dynamical problems, require extremely careful numerical analysis. Typically there is a trade-off between convergence, accuracy and numerical oscillation. This is the case in particular when the initial data is large relative to the viscosity coefficient  $\epsilon$  in Burgers' equation. Higher order methods are preferred to lower order methods only when the time and/or spatial step sizes are sufficiently small, where the smallness is a delicate question. It is not the purpose of our paper to find the best approximation scheme for our problem, simply to demonstrate our theoretical results. Our numerical simulation is based on an unconditionally stable, fully implicit scheme of second order accuracy, using three time level quadratic approximation in time and central difference scheme in space. The simulations were carried out on various platforms using several different numerical packages (OCTAVE, SCILAB, MATLAB), and they show grid independence for sufficiently small time and spatial grid.

We consider first Burgers' equation (2.1) with zero Neumann boundary condition (uncontrolled system) and then the regulation error system (2.4)–(2.7) with  $\epsilon = 0.1$  and with initial data  $w_0(x) = W_0(x) - W_d$ , where  $W_d = 3$  and  $W_0(x) = 20(0.5 - x)^3$ . The uncontrolled system is shown in Fig. 1(a). The solution seems to converge to a nonzero “equilibrium” profile, although it eventually approaches zero, which

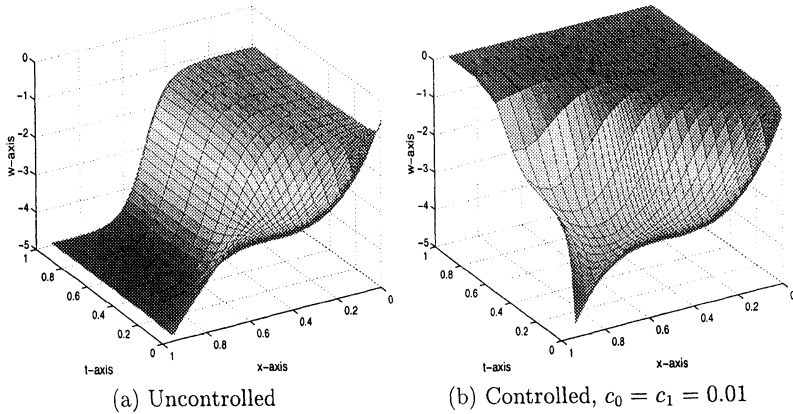


FIGURE 1 Simulations of Burgers' equation with  $\epsilon = 0.1$ .

could be seen only for  $t \gg 1$  (in fact, for some initial data, the numerical solution gets trapped into this profile and never converges to zero [2]). This unsatisfactory behavior is remedied by applying boundary feedback, as shown in Fig. 1(b).

### Acknowledgement

This work was supported by grants from the Air Force Office of Scientific Research, the National Science Foundation and the Office of Naval Research.

### References

- [1] J.A. Burns and S. Kang, A control problem for Burgers' equation with bounded input/output, *Nonlinear Dynamics*, vol. 2, 1991, pp. 235–262.
- [2] J. Burns, A. Balogh, D.S. Gilliam and V.I. Shubov, Numerical Stationary Solutions for a Viscous Burgers' Equation, *Journal of Mathematical Systems, Estimations, and Control*, vol. 8, No. 2, pp. 1–16, 1998.
- [3] C.I. Byrnes, D.S. Gilliam and V.I. Shubov, Boundary control for a viscous Burgers' equation, in H.T. Banks, R.H. Fabiano, and K. Ito (Eds.), *Identification and Control for Systems Governed by Partial Differential Equations*, SIAM, 1993, pp. 171–185.
- [4] C.I. Byrnes, D.S. Gilliam and V.I. Shubov, On the Global Dynamics of a Controlled Viscous Burgers' equation, *Journal of Dynamical and Control Systems*, vol. 4, No. 4, pp. 457–519, 1998.
- [5] L.A. Caffarelli and A. Friedman, Blow-up of Solutions of Nonlinear Heat Equations, *Journal of Mathematical Analysis and Applications*, 129, pp. 409–419, 1988.

- [6] J.H. Ferziger and M. Perić, *Computational Methods for Fluid Dynamics*, Springer-Verlag, Berlin, 1996.
- [7] V.A. Galaktionov and H.A. Levine, On Critical Fujita Exponents for Heat Equations with Nonlinear Flux Conditions on the Boundary, *Israel Journal of Mathematics*, **94**, pp. 125–146, 1996.
- [8] K. Ito and Y. Yan, Viscous Scalar Conservation Law with Nonlinear Flux Feedback and Global Attractors, *Journal of Mathematical Analysis and Applications*, **227**, pp. 271–299, 1998.
- [9] M. Krstić, On Global Stabilization of Burgers' Equation by Boundary Control, *Proceedings of the 1998 IEEE Conference on Decision and Control*, Tampa, Florida.
- [10] O.A. Ladyzhenskaya, V.A. Solonnikov and N.N. Ural'ceva, Linear and Quasi-linear Equations of Parabolic Type, *Translations of AMS*, Vol. 23, 1968.
- [11] H.A. Levine, Stability and Instability for Solutions of Burgers' Equation with a Semi-linear Boundary Condition, *SIAM Journal of Mathematical Analysis*, vol. 19, No. 2, pp. 312–336, March 1988.
- [12] H.V. Ly, K.D. Mease and E.S. Titi, Distributed and boundary control of the viscous Burgers' equation, *Numerical Functional Analysis and Optimization*, vol. 18, pp. 143–188, 1997.

## Special Issue on Modeling Experimental Nonlinear Dynamics and Chaotic Scenarios

### Call for Papers

Thinking about nonlinearity in engineering areas, up to the 70s, was focused on intentionally built nonlinear parts in order to improve the operational characteristics of a device or system. Keying, saturation, hysteretic phenomena, and dead zones were added to existing devices increasing their behavior diversity and precision. In this context, an intrinsic nonlinearity was treated just as a linear approximation, around equilibrium points.

Inspired on the rediscovering of the richness of nonlinear and chaotic phenomena, engineers started using analytical tools from “Qualitative Theory of Differential Equations,” allowing more precise analysis and synthesis, in order to produce new vital products and services. Bifurcation theory, dynamical systems and chaos started to be part of the mandatory set of tools for design engineers.

This proposed special edition of the *Mathematical Problems in Engineering* aims to provide a picture of the importance of the bifurcation theory, relating it with nonlinear and chaotic dynamics for natural and engineered systems. Ideas of how this dynamics can be captured through precisely tailored real and numerical experiments and understanding by the combination of specific tools that associate dynamical system theory and geometric tools in a very clever, sophisticated, and at the same time simple and unique analytical environment are the subject of this issue, allowing new methods to design high-precision devices and equipment.

Authors should follow the Mathematical Problems in Engineering manuscript format described at <http://www.hindawi.com/journals/mpe/>. Prospective authors should submit an electronic copy of their complete manuscript through the journal Manuscript Tracking System at <http://mts.hindawi.com/> according to the following timetable:

Manuscript Due	February 1, 2009
First Round of Reviews	May 1, 2009
Publication Date	August 1, 2009

### Guest Editors

**José Roberto Castilho Piqueira**, Telecommunication and Control Engineering Department, Polytechnic School, The University of São Paulo, 05508-970 São Paulo, Brazil; [piqueira@lac.usp.br](mailto:piqueira@lac.usp.br)

**Elbert E. Neher Macau**, Laboratório Associado de Matemática Aplicada e Computação (LAC), Instituto Nacional de Pesquisas Espaciais (INPE), São José dos Campos, 12227-010 São Paulo, Brazil ; [elbert@lac.inpe.br](mailto:elbert@lac.inpe.br)

**Celso Grebogi**, Department of Physics, King's College, University of Aberdeen, Aberdeen AB24 3UE, UK; [grebogi@abdn.ac.uk](mailto:grebogi@abdn.ac.uk)