

Solution of Nonlinear Volterra-Hammerstein Integral Equations Via Rationalized Haar Functions

M. RAZZAGHI^{a, b, *} and Y. ORDOKHANI^b

^a*Department of Mathematics and Statistics, Mississippi State University,
Mississippi State, MS 39762;* ^b*Department of Mathematics,
Amirkabir University, Tehran, Iran*

(Received 8 May 2000; In final form 23 October 2000)

Rationalized Haar functions are developed to approximate the solutions of the nonlinear Volterra-Hammerstein integral equations. Properties of Rationalized Haar functions are first presented, and the operational matrix of integration together with the product operational matrix are utilized to reduce the computation of integral equations to into some algebraic equations. The method is computationally attractive, and applications are demonstrated through illustrative examples.

Keywords: Rationalized Haar; Volterra-Hammerstein; Nonlinear; Integral equations

AMS Classifications: 45D05, 45Lxx

1. INTRODUCTION

Orthogonal functions have received considerable attention in dealing with various problems of dynamic systems. The main characteristic of this technique is that it reduces these problems to those of solving a system of algebraic equations thus greatly simplifying the problem.

*Corresponding author. Tel.: 662-325-7141, Fax: 601-325-0005, e-mail: razzaghi@math.msstate.edu

The approach is based on converting the underlying differential equations into integral equations through integration, approximating various signals involved in the equation by truncated orthogonal series $\phi(t) = [\phi_0(t), \phi_1(t), \dots, \phi_{k-1}(t)]^T$ and using the operational matrix of integration P to eliminate the integral operations. The elements $\phi_0(t), \phi_1(t), \dots, \phi_{k-1}(t)$ are the basis functions, orthogonal on a certain interval, and the matrix P can be uniquely determined based on the particular orthogonal functions. Orthogonal functions have also been proposed to solve linear integral equations. Special attention has been given to applications of Walsh functions [1], block-pulse functions [2], Laguerre series [3], Legendre polynomials [4], Chebyshev polynomials [5] and Fourier series [6].

The orthogonal set of Haar functions is a group of square waves with magnitude of $+2^{(i/2)}$, $-2^{(i/2)}$ and 0, $i = 0, 1, 2, \dots$ [7]. The use of the Haar functions comes from the rapid convergence feature of Haar series in expansion of function compared with that of Walsh series [8]. Lynch *et al.* [9] and [10] have rationalized the Haar transform by deleting the irrational numbers and introducing the integral powers of two. This modification results in what is called the rationalized Haar (RH) transform. The RH transform preserves all the properties of the original Haar transform and can be efficiently implemented using digital pipeline architecture [10]. The corresponding functions are known as RH functions. The RH functions are composed of only three amplitudes $+1$, -1 and 0.

In Refs. [11–13] the authors offered a numerical method to solve linear differential equations and its application to function evaluation. The method used was based on the stairstep approximation using Haar functions and on mathematical manipulation using quasi-binary numbers. However, there are some difficulties for practical use as in [11–13]. This is because the Haar functions have magnitudes of $+2^{(i/2)}$, $-2^{(i/2)}$, and 0, $i = 0, 1, 2, \dots$, and an operating system dealing with quasi-binary numbers is required for speedy manipulation. To overcome these difficulties, RH functions were used in [14–16]. In these references the RH functions operational matrix of integration was applied to solve linear ordinary differential equations [14], first and second order linear partial differential equations [15] and variational problems [16].

In the present paper we are concerned with the application of RH functions to the numerical solution of nonlinear Volterra-Hammerstein integral equations of the form

$$y(t) = f(t) + \int_0^t \kappa(t, s)g(s, y(s))ds, \quad 0 \leq t < 1 \quad (1)$$

where f , g and κ are given continuous functions, with $g(s, y)$ nonlinear in y . We assume that Eq. (1) has a unique solution y to be determined.

Several numerical methods for approximating the solution of Hammerstein integral equations are known. For Fredholm-Hammerstein integral equations, the classical method of successive approximations was introduced in [17]. A variation of the Nystrom method was presented in [18]. A collocation-type method was developed in [19]. In [20], Brunner applied a collocation-type method to Eq. (1) and integro-differential equations, and discussed its connection with the iterated collocation method. Guoqiang [21] introduced and discussed the asymptotic error expansion of a collocation-type method for Volterra-Hammerstein integral equations. The methods in [19] and [21] transform a given integral equation into a system of nonlinear equations, which has to be solved with some kind of iterative method. In [19], only in favorable cases the definite integrals involved in the solution may be evaluated analytically, while in [21] the integrals involved in the solution have to be evaluated at each time step of the iteration.

In this paper, we apply RH functions to solve the nonlinear Volterra-Hammerstein integral equations given in Eq. (1). The method is first applied to an equivalent integral equation $z = g(t, y(t))$, $t \in [-1, 1]$ where the solution z is approximated by a RH function with unknown coefficients. The operational matrices of integration and product together with Newton-Cotes nodes [22] are then used to evaluate the unknown coefficients and find approximate solutions for $y(t)$. It is known that spectral projection methods provide highly accurate approximations for the solutions of operator equations in functions spaces, provided that these solutions are sufficiently smooth [23]. Our approach is different from the methods initiated in [20] and [21]. The major difference between our analysis and those of [20] and [21] being the fact that for polynomial interpolation, uniform convergence of interpolants can not be guaranteed for every continuous function, regardless of the

choice of the interpolation nodes [24]. Moreover, the uniform convergence under suitable conditions using the spectral methods is established in [24] and [25] for nonlinear Fredholm-Hammerstein [24] and nonlinear Volterra-Hammerstein [25] integral equations. The advantages of the proposed method are that:

- (1) using RH functions properties the integrals involved in the solution are calculated once and a set of nonlinear algebraic equations are obtained.
- (2) using Newton-Cotes nodes, these nonlinear equations are solved and as a result the solution to Eq. (1) is calculated. The Haar transform is much faster than the Fourier transform, and it is even faster than the Walsh transform [26].

Illustrative examples are included to demonstrate the validity and applicability of the technique.

2. PROPERTIES OF RATIONALIZED HAAR FUNCTIONS

2.1. Rationalized Haar Functions

The RH functions $RH(r, t)$, $r = 1, 2, 3, \dots$ are composed of three values $+1$, -1 and 0 and can be defined on the interval $[0, 1)$ as [14]

$$RH(r, t) = \begin{cases} 1, & J_1 \leq t < J_{(1/2)} \\ -1, & J_{(1/2)} \leq t < J_0 \\ 0, & \text{otherwise} \end{cases} \quad (2)$$

where

$$J_u = \frac{j-u}{2^i}, \quad u = 0, \frac{1}{2}, 1.$$

The value of r is defined by two parameters i and j as

$$r = 2^i + j - 1, \quad i = 0, 1, 2, 3, \dots \quad j = 1, 2, 3, \dots, 2^i.$$

$RH(0, t)$ is defined for $i=j=0$ and is given by

$$RH(0, t) = 1, \quad 0 \leq t < 1. \quad (3)$$

A set of the first eight RH functions is shown in Figures 1–8, where, $r=0, 1, 2, \dots, 7$. The first two functions are nonzero over the whole




FIGURE 1 $RH(0, t)$ obtained for $i=0$ and $j=0$.

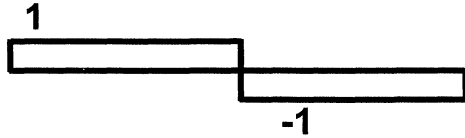


FIGURE 2 $RH(1, t)$ obtained for $i=0$ and $j=1$.

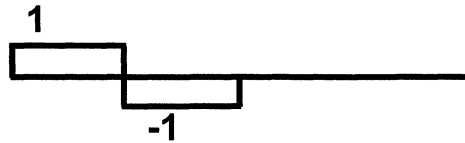


FIGURE 3 $RH(2, t)$ obtained for $i=1$ and $j=1$.



FIGURE 4 $RH(3, t)$ obtained for $i=1$ and $j=2$.




FIGURE 5 $RH(4, t)$ obtained for $i=2$ and $j=1$.



FIGURE 6 $RH(5, t)$ obtained for $i=2$ and $j=2$.

interval on $0 \leq t < 1$, the rest are nonzero only over a portion on $0 \leq t < 1$. Haar functions become increasingly localized as their number increases and can be generated recursively [27].

FIGURE 7 $RH(6, t)$ obtained for $i=2$ and $j=3$.FIGURE 8 $RH(7, t)$ obtained for $i=2$ and $j=4$.

The orthogonality property is given by

$$\int_0^1 RH(r, t)RH(v, t)dt = \begin{cases} 2^{-i} & \text{for } r = v \\ 0 & \text{for } r \neq v \end{cases}$$

where

$$v = 2^n + m - 1, \quad n = 0, 1, 2, \dots \quad m = 1, 2, \dots, 2^n.$$

2.2. Function Approximation

A function $f(t)$ defined over the interval $[0, 1)$ may be expanded into RH functions as

$$f(t) = \sum_{r=0}^{+\infty} a_r RH(r, t), \quad (4)$$

where

$$a_r = 2^i \int_0^1 f(t)RH(r, t)dt, \quad r = 0, 1, 2, \dots$$

with

$$r = 2^i + j - 1, \quad i = 0, 1, 2, 3, \dots \quad j = 1, 2, 3, \dots, 2^i \text{ and } r = 0 \text{ for } i = j = 0. \quad (5)$$

The series in Eq. (4) contains an infinite number of terms. If we let $i = 0, 1, 2, \dots, \alpha$ then the infinite series in Eq. (4) is truncated up to its

first k terms as

$$f(t) = \sum_{r=0}^{k-1} a_r RH(r, t) = A^T \phi(t), \tag{6}$$

where

$$k = 2^{\alpha+1}, \quad \alpha = 0, 1, 2, \dots$$

The RH function coefficient vector A and RH function vector $\phi(t)$ are defined as

$$A = [a_0, a_1, \dots, a_{k-1}]^T, \tag{7}$$

$$\phi(t) = [\phi_0(t), \phi_1(t), \dots, \phi_{k-1}(t)]^T, \tag{8}$$

where

$$\phi_r(t) = RH(r, t), \quad r = 0, 1, 2, \dots, k - 1.$$

Now let $\kappa(t, s)$ be a function of two independent variables defined for $t \in [0, 1)$ and $s \in [0, 1)$. Then κ can be expanded into RH functions as

$$\kappa(t, s) = \sum_{v=0}^{k-1} \sum_{r=0}^{k-1} h_{vr} \phi_r(t) \phi_v(s),$$

where

$$h_{vr} = 2^{i+n} \int_0^1 \int_0^1 \kappa(t, s) \phi_r(t) \phi_v(s) dt ds,$$

with v defined similarly to r in Eq. (5) and $i, n = 0, 1, 2, \dots, \alpha$. Hence we have

$$\kappa(t, s) = \phi^T(t) H \phi(s), \tag{9}$$

where

$$H = (h_{vr})_{k \times k}^T. \tag{10}$$

If each waveform is divided into eight intervals, the magnitude of the waveform can be represented as

$$\hat{\Phi}_{8 \times 8} = \begin{bmatrix} \phi_0 \\ \phi_1 \\ \vdots \\ \phi_7 \end{bmatrix} = \begin{bmatrix} 1 & 1 & 1 & 1 & 1 & 1 & 1 & 1 \\ 1 & 1 & 1 & 1 & -1 & -1 & -1 & -1 \\ 1 & 1 & -1 & -1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 1 & -1 & -1 \\ 1 & -1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & -1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & -1 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 1 & -1 \end{bmatrix}. \quad (11)$$

In Eq. (11) the row denotes the order of the Haar function. The matrix $\hat{\Phi}_{k \times k}$ can be expressed as

$$\hat{\Phi}_{k \times k} = [\phi(1/2k), \phi(3/2k), \dots, \phi((2k-1)/2k)]. \quad (12)$$

Using Eq. (6) we get

$$[f(1/2k), f(3/2k), \dots, f((2k-1)/2k)] = A^T \hat{\Phi}_{k \times k}. \quad (13)$$

From Eqs. (10) and (13) we have

$$H = (\hat{\Phi}_{k \times k}^{-1})^T \hat{H} \hat{\Phi}_{k \times k}^{-1}, \quad (14)$$

where

$$\hat{H} = (\hat{h}_{lp})_{k \times k}, \quad \hat{h}_{lp} = \kappa((2l-1)/2k, (2p-1)/2k), \quad p, l = 1, 2, \dots, k.$$

2.3. Operational Matrix of Integration

The integration of the $\phi(t)$ defined in Eq. (8) is given by

$$\int_0^t \phi(t') dt' = P\phi(t), \quad (15)$$

where $P = P_{k \times k}$ is the $k \times k$ operational matrix for integration and is given in [14] as

$$P_{k \times k} = \frac{1}{2k} \begin{bmatrix} 2kP_{(k/2) \times (k/2)} & -\hat{\Phi}_{(k/2) \times (k/2)} \\ \hat{\Phi}_{(k/2) \times (k/2)}^{-1} & 0 \end{bmatrix},$$

where $\hat{\Phi}_1 = [1]$, $P_1 = [1/2]$, $\hat{\Phi}_{k \times k}$ can be obtained similarly to $\hat{\Phi}_{8 \times 8}$ in Eq. (11), and

$$\hat{\Phi}_{k \times k}^{-1} = \left(\frac{1}{k}\right) \hat{\Phi}_{k \times k}^T \text{diag.} \left(1, 1, 2, 2, \underbrace{2^2, \dots, 2^2}_{2^2}, \underbrace{2^3, \dots, 2^3}_{2^3}, \dots, \underbrace{\frac{k}{2}, \dots, \frac{k}{2}}_{k/2}\right).$$

2.4. The Product Operational Matrix

Let the product of $\phi(t)\phi^T(t)$ be called the RH product matrix $\Psi_{k \times k}(t)$. That is,

$$\phi(t)\phi^T(t) = \Psi_{k \times k}(t).$$

To illustrate the calculation procedures we choose $k = 8$. Using Eqs. (2) and (3) we get

$$\phi_0(t)\phi_q(t) = \phi_0(t), \quad q = 0, 1, \dots, 7$$

and for $p < q$, we have

$$\phi_p(t)\phi_q(t) = \begin{cases} \phi_q(t), & \text{if } \phi_q(t) \text{ occurs during the first positive half wave of } \phi_p(t) \\ -\phi_q(t), & \text{if } \phi_q(t) \text{ occurs during the second negative half wave of } \phi_p(t) \\ 0, & \text{otherwise.} \end{cases}$$

Also, the square of any RH functions is a block pulse with magnitude of 1 during both the positive and negative half waves of RH functions. Thus we get

$$\Psi_{8 \times 8}(t) = \begin{bmatrix} \phi_0 & \phi_1 & \phi_2 & \phi_3 & \phi_4 & \phi_5 & \phi_6 & \phi_7 \\ \phi_1 & \phi_0 & \phi_2 & -\phi_3 & \phi_4 & \phi_5 & -\phi_6 & -\phi_7 \\ \phi_2 & \phi_2 & (\phi_0 + \phi_1)/2 & 0 & \phi_4 & -\phi_5 & 0 & 0 \\ \phi_3 & -\phi_3 & 0 & (\phi_0 - \phi_1)/2 & 0 & 0 & \phi_6 & -\phi_7 \\ \phi_4 & \phi_4 & \phi_4 & 0 & (\phi_0 + \phi_1 + 2\phi_2)/4 & 0 & 0 & 0 \\ \phi_5 & \phi_5 & -\phi_5 & 0 & 0 & (\phi_0 + \phi_1 - 2\phi_2)/4 & 0 & 0 \\ \phi_6 & -\phi_6 & 0 & \phi_6 & 0 & 0 & (\phi_0 - \phi_1 + 2\phi_3)/4 & 0 \\ \phi_7 & -\phi_7 & 0 & -\phi_7 & 0 & 0 & 0 & (\phi_0 - \phi_1 - 2\phi_3)/4 \end{bmatrix}$$

In general we have

$$\Psi_{k \times k}(t) = \begin{pmatrix} \Psi_{(k/2) \times (k/2)}(t) & H_{(k/2) \times (k/2)}^*(t) \\ H_{(k/2) \times (k/2)}^{*T}(t) & D_{(k/2) \times (k/2)}^*(t) \end{pmatrix}, \quad (16)$$

where

$$\begin{aligned} \Psi_{1 \times 1}(t) &= \phi_0, \\ H_{(k/2) \times (k/2)}^*(t) &= \hat{\Phi}_{(k/2) \times (k/2)} \text{diag}[\phi_{(k/2)}(t), \phi_{(k/2)+1}(t), \dots, \phi_{k-1}(t)], \\ D_{(k/2) \times (k/2)}^*(t) &= \text{diag}[\hat{\Phi}_{(k/2) \times (k/2)}^{-1}[\phi_0(t), \phi_1(t), \dots, \phi_{(k/2)-1}(t)]^T]^T. \end{aligned}$$

Furthermore, by multiplying the matrix $\Psi_{k \times k}(t)$ in Eq. (16) by the vector A in Eq. (7) we obtain

$$\Psi_{k \times k}(t)A = \tilde{A}_{k \times k}\phi(t), \quad (17)$$

where $\tilde{A}_{k \times k}$ is a $k \times k$ matrix given by

$$\tilde{A}_{k \times k} = \begin{pmatrix} \tilde{A}_{(k/2) \times (k/2)} & \tilde{H}_{(k/2) \times (k/2)} \\ \tilde{H}_{(k/2) \times (k/2)} & \tilde{D}_{(k/2) \times (k/2)} \end{pmatrix},$$

with

$$\begin{aligned} \tilde{A}_{1 \times 1} &= a_0, \\ \tilde{H}_{(k/2) \times (k/2)} &= \hat{\Phi}_{(k/2) \times (k/2)} \text{diag}[a_{(k/2)}, a_{(k/2)+1}, \dots, a_{k-1}], \\ \tilde{H}_{(k/2) \times (k/2)} &= \text{diag}[a_{(k/2)}, a_{(k/2)+1}, \dots, a_{k-1}] \hat{\Phi}_{(k/2) \times (k/2)}^{-1}, \end{aligned}$$

and

$$\tilde{D}_{(k/2) \times (k/2)} = \text{diag}[[a_0, a_1, \dots, a_{(k/2)-1}] \hat{\Phi}_{(k/2) \times (k/2)}].$$

For $k=4$ we have

$$\tilde{A}_{4 \times 4} = \begin{bmatrix} a_0 & a_1 & a_2 & a_3 \\ a_1 & a_0 & a_2 & -a_3 \\ a_2/2 & a_2/2 & a_0 + a_1 & 0 \\ a_3/2 & -a_3/2 & 0 & a_0 - a_1 \end{bmatrix}.$$

3. NONLINEAR VOLTERRA-HAMMERSTEIN INTEGRAL EQUATIONS

Consider Volterra-Hammerstein integral equations given in Eq. (1). To solve for $y(t)$, we first approximate the solution not to the Eq. (1), but rather to an equivalent equation

$$z(t) = g(t, y(t)), \quad 0 \leq t < 1. \tag{18}$$

From Eq. (1) we get

$$z(t) = g(t, f(t) + \int_0^t \kappa(t, s)z(s)ds). \tag{19}$$

Suppose $z(t)$ can be expressed approximately as

$$z(t) = A^T \phi(t), \tag{20}$$

where A and $\phi(t)$ are given in Eqs. (7) and (8) respectively. Using Eqs. (9), (17) and (20) we have

$$\int_0^t \kappa(t, s)g(s, y(s))ds = \int_0^t \phi^T(t)H\tilde{A}\phi(s)ds.$$

From Eqs. (15) and (19) we get

$$z(t) = g(t, f(t) + \phi^T(t)H\tilde{A}P\phi(t)) \tag{21}$$

In order to construct the approximations for $z(t)$ we collocate Eq. (21) in k points. For a suitable collocation points we choose Newton-Cotes nodes as

$$t_p = \frac{2p-1}{2k}, \quad p = 1, 2, 3, \dots, k. \tag{22}$$

By using Eqs. (12) and (22) we have

$$\phi(t_p) = \hat{\Phi}_{k \times k} e_p, \quad p = 1, 2, \dots, k \tag{23}$$

where

$$e_p = \left[\underbrace{0, 0, \dots, 0}_{p-1}, 1, \underbrace{0, \dots, 0}_{k-p} \right]^T.$$

Equation (21) can be expressed as

$$z(t_p) = g(t_p, f(t_p)) + e_p^T \hat{\Phi}_{k \times k}^T H \tilde{A} P \hat{\Phi}_{k \times k} e_p, \quad p = 1, 2, 3, \dots, k. \quad (24)$$

Equation (24) can be solved for the unknowns a_r , $r = 0, 1, 2, \dots, k-1$. The required approximations to the solution $y(t)$ in Eq. (1) are obtained and $y(t)$ is given by

$$y(t) = f(t) + \int_0^t \kappa(t, s) z(s) ds, \quad 0 \leq t < 1.$$

Using Eqs. (9), (15) and (17) we get

$$y(t) = f(t) + \phi^T(t) H \tilde{A} P \phi(t) \quad (25)$$

where the matrices H and \tilde{A} can be calculated from Eqs. (14) and (24).

4. ILLUSTRATIVE EXAMPLES

4.1. Example 1

Consider the nonlinear Volterra-Hammerstein integral equation

$$y(t) = f(t) + \int_0^t \kappa(t, s) y^2(s) ds, \quad 0 \leq t < 1 \quad (26)$$

where $\kappa(t, s) = ts + 1$, and

$$f(t) = -\frac{1}{4}t^5 - \frac{2}{3}t^4 - \frac{5}{6}t^3 - t^2 + 1.$$

By using the method in Section 3, Eq. (26) is solved. The computational results for $k=8$ and $k=16$ together with the exact solution $y(t) = t+1$ are given in Table I.

4.2. Example 2

Consider

$$y(t) = 1 + \sin^2(t) - \int_0^t 3 \sin(t-s) y^2(s) ds, \quad 0 \leq t < 1 \quad (27)$$

TABLE I Approximate and exact solutions for Example 1

t	Approximate $k=8$	Approximate $k=16$	Exact
0.0	1.034	1.005	1.0
0.1	1.089	1.112	1.1
0.2	1.191	1.204	1.2
0.3	1.325	1.301	1.3
0.4	1.411	1.400	1.4
0.5	1.521	1.502	1.5
0.6	1.594	1.599	1.6
0.7	1.710	1.700	1.7
0.8	1.849	1.801	1.8
0.9	1.941	1.912	1.9
1	1.987	1.999	2.0

TABLE II Approximates and exact solutions for Example 2

t	Approximate $k=16$	Exact
0.0	1	1
0.1	.9952	.9950
0.2	0.9800	0.9801
0.3	0.9554	0.9553
0.4	0.9210	0.9211
0.5	0.8775	0.8776
0.6	0.8255	0.8253
0.7	0.7648	0.7648
0.8	0.6969	0.6967
0.9	0.6217	0.6216
1	0.5405	0.5403

We solve Eq. (27) using the method in Section 3. The computational results for $k=16$ together with the exact solution $y(t)=\cos t$ are given in Table II.

5. CONCLUSION

The double rationalized Haar functions and the associated matrices of integration and product are applied to solve nonlinear Volterra-Hammerstein integral equations. The matrices $\hat{\Phi}_{k \times k}$ and $\hat{\Phi}_{k \times k}^{-1}$ introduced in Eqs. (12) and (14) contain many zeros, and these zeros make the Haar transform faster than other square functions such as Walsh and block-pulse functions, hence making rationalized Haar

functions computationally very attractive. Examples with satisfactory results are used to demonstrate the application of this method.

References

- [1] Hsiao, C. H. and Chen, C. F. (1979). Solving integral equations via Walsh functions, *Comput. Elec. Engng.*, **6**, 279–292.
- [2] Wang, C. H. and Shih, Y. P. (1982). Explicit solutions of integral equations via block-pulse functions, *Int. J. Syst. Sci.*, **13**, 773–782.
- [3] Hwang, C. and Shih, Y. P. (1982). Solution of integral equations via Laguerre polynomials, *Comp. and Elect. Engng.*, **9**, 123–129.
- [4] Chang, R. Y. and Wang, M. L. (1985). Solutions of integral equations via shifted Legendre polynomials, *Int. J. Syst. Sci.*, **16**, 197–208.
- [5] Chou, J. H. and Horng, I. R. (1985). Double-shifted Chebyshev series for convolution integral and integral equations, *Int. J. Contr.*, **42**, 225–232.
- [6] Razzaghi, M., Razzaghi, M. and Arabshahi, A. (1990). Solution of convolution integral and Fredholm integral equations via double Fourier series, *Appl. Math. Comp.*, **40**, 215–224.
- [7] Razzaghi, M. and Nazarzadeh, J. (1999). Walsh Functions, *Wiley Encyclopedia of Electrical and Electronics Engineering*, **23**, 429–440.
- [8] Beauchamp, K. G. (1975). *Walsh Functions and Their Applications*.
- [9] Lynch, R. T. and Reis, J. J. (1976). Haar transform image coding, *Proc. National Telecommun. Conf.*, Dallas TX, pp. 44.3–1–44.3.
- [10] Reis, J. J., Lynch, R. T. and Butman, J. (1976). Adaptive Haar transform video bandwidth reduction system for RPV's, *Proc. Ann. Meeting Soc. Photo Optic Inst. Eng.(SPIE)*, San Diego CA, pp. 24–35.
- [11] Kobayashi, Y., Ohkita, M. and Inoue, M. (1983). Function generation by numerical integration, *Math. Comput. in Simulations*, **25**, 31–38.
- [12] Ohkita, M. (1985). Haar approximation of analytic functions and its generation, *IEE of Japan*, **105-C**, 101–108.
- [13] Ohkita, M. (1985). Evaluation analytic functions by generalized digital integration, *Math. Comput. in Simulations, Special Issue on Orthogonal Expansions and Transforms in Computation, Signal Processing and Design*, **27**, 511–517.
- [14] Ohkita, M. and Kobayashi, Y. (1986). An application of rationalized Haar functions to solution of linear differential equations, *IEEE Trans, on Circuit and Systems*, **9**, 853–862.
- [15] Ohkita, M. and Kobayashi, Y. (1988). An application of rationalized Haar functions to solution of linear partial differential equations, *Math. Comput. in Simulations*, **30**, 419–428.
- [16] Razzaghi, M. and Ordokhani, Y., An application of rationalized Haar functions for variational problems, In: *Appl. Math. and Computation*, to appear.
- [17] Tricomi, F. G. (1982). *Integral Equation*, Dover.
- [18] Lardy, L. J. (1981). A variation of Nystrom's method for Hammerstein equations, *J. Integral Equations*, **3**, 43–60.
- [19] Kumar, S. and Sloan, I. H. (1987). A new collocation-type method for Hammerstein integral equations, *J. Math. Comp.*, **48**, 123–129.
- [20] Brunner, H. (1982). Implicitly linear collocation method for nonlinear Volterra equations, *J. Appl. Num. Math.*, **9**, 235–247.
- [21] Guoqiang, H. (1993). Asymptotic error expansion variation of a collocation method for Volterra-Hammerstein equations, *J. Appl. Num. Math.*, **13**, 357–369.
- [22] Phillips, G. M. and Taylor, P. J., *Theory and Applications of Numerical Analysis*, Academic Press, New York, 1973.

- [23] Canuto, C., Hussaini, M. Y., Quarteroni, A. and Zang, T. A., *Spectral Methods in Fluid Dynamic*, Springer-Verlag, 1987.
- [24] Elnagar, G. N. and Razzaghi, M. (1996). A Pseudospectral Method for Hammerstein equations, *J. Math. Anal. Appl.*, **199**, 579–591.
- [25] Elnagar, G. N. and Kazemi, M. (1996). Chebyshev spectral solution of nonlinear Volterra-Hammerstein integral equations, *J. Comp. Appl. Math.*, **76**, 147–158.
- [26] Chen, C. F. and Hsiao, C. H. (1997). Haar wavelet method for solving lumped and distributed-parameter systems, *IEE Proc. Control Theory Appl.*, **144**, 87–94.
- [27] Elliott, D. E. and Rao, K. R., *Fast Transform, Algorithms, Analysis, Applications*, Academic Press, New York, 1982.

Special Issue on Singular Boundary Value Problems for Ordinary Differential Equations

Call for Papers

The purpose of this special issue is to study singular boundary value problems arising in differential equations and dynamical systems. Survey articles dealing with interactions between different fields, applications, and approaches of boundary value problems and singular problems are welcome.

This Special Issue will focus on any type of singularities that appear in the study of boundary value problems. It includes:

- Theory and methods
- Mathematical Models
- Engineering applications
- Biological applications
- Medical Applications
- Finance applications
- Numerical and simulation applications

Before submission authors should carefully read over the journal's Author Guidelines, which are located at <http://www.hindawi.com/journals/bvp/guidelines.html>. Authors should follow the Boundary Value Problems manuscript format described at the journal site <http://www.hindawi.com/journals/bvp/>. Articles published in this Special Issue shall be subject to a reduced Article Processing Charge of €200 per article. Prospective authors should submit an electronic copy of their complete manuscript through the journal Manuscript Tracking System at <http://mts.hindawi.com/> according to the following timetable:

Manuscript Due	May 1, 2009
First Round of Reviews	August 1, 2009
Publication Date	November 1, 2009

Lead Guest Editor

Juan J. Nieto, Departamento de Análisis Matemático, Facultad de Matemáticas, Universidad de Santiago de

Compostela, Santiago de Compostela 15782, Spain;
juanjose.nieto.roig@usc.es

Guest Editor

Donal O'Regan, Department of Mathematics, National University of Ireland, Galway, Ireland;
donal.oregan@nuigalway.ie